

RISONATORI CERAMICI

Alta frequenza


2 terminali

Codice Adimpex: **LR010000-L**

RISONATORE CERAMICO 1MHz

Serie:CR

p/n:CR1000K

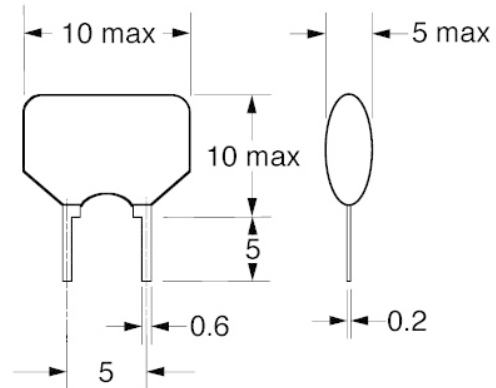

Codice Adimpex	Frequenza	Tolleranza	Impedenza	C1	C2
LR010000	1.0 MHz	± 0.5 kHz	200 Ω	30 pF	30 pF
LR020000	2.0 MHz	± 0.5 kHz	200 Ω	30 pF	30 pF
LR040000	4.0 MHz	± 0.5 kHz	30 Ω	30 pF	30 pF
LR050000	5.0 MHz	± 0.5 kHz	30 Ω	30 pF	30 pF
LR055000	5.5 MHz	± 0.5 kHz	30 Ω	30 pF	30 pF
LR060000	6.0 MHz	± 0.5 kHz	30 Ω	30 pF	30 pF
LR080000	8.0 MHz	± 0.5 kHz	30 Ω	30 pF	30 pF

CARATTERISTICHE

- Gamma di frequenza fornibile:
bassa frequenza: 190 ÷ 1050 kHz
alta frequenza: 1.00 ÷ 25.99 MHz

FEATURES

- Available frequency range:
low frequency: 190 ÷ 1050 kHz
high frequency: 1.00 ÷ 25.99 MHz