

RISONATORI CERAMICI

Alta frequenza



3 terminali

Codice Adimpex: **LR303580-L**

RISONATORE CERAMICO 3P 3.58MHz

Serie:CR

p/n:CR35803

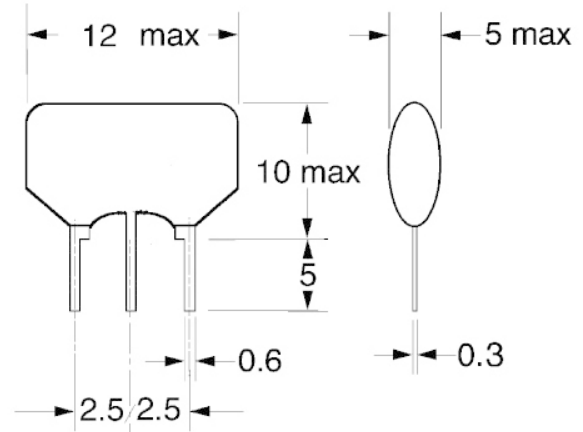

Codice Adimpex	Frequenza	Tolleranza	Impedenza	C1	C2
LR302000	2.0 MHz	± 0.5 kHz	200 Ω	30 pF	30 pF
LR303580	3.58 MHz	± 0.5 kHz	30 Ω	30 pF	30 pF
LR304000	4.0 MHz	± 0.5 kHz	30 Ω	30 pF	30 pF
LR305000	5.0 MHz	± 0.5 kHz	30 Ω	30 pF	30 pF
LR306000	6.0 MHz	± 0.5 kHz	30 Ω	30 pF	30 pF
LR308000	8.0 MHz	± 0.5 kHz	30 Ω	30 pF	30 pF
LR310000	10.0 MHz	± 0.5 kHz	150 Ω	30 pF	30 pF
LR312000	12.0 MHz	± 0.5 kHz	150 Ω	30 pF	30 pF
LR312500	12.5 MHz	± 0.5 kHz	150 Ω	30 pF	30 pF
LR316000	16.0 MHz	± 0.5 kHz	150 Ω	30 pF	30 pF
LR320000	20.0 MHz	± 0.5 kHz	100 Ω	15 pF	15 pF
LR324000	24.0 MHz	± 0.5 kHz	100 Ω	15 pF	15 pF

CARATTERISTICHE

- Gamma di frequenza fornibile:
bassa frequenza: 190 ÷ 1050 kHz
alta frequenza: 1.00 ÷ 25.99 MHz

FEATURES

- Available frequency range:
low frequency: 190 ÷ 1050 kHz
high frequency: 1.00 ÷ 25.99 MHz