

Membrane Position Sensor

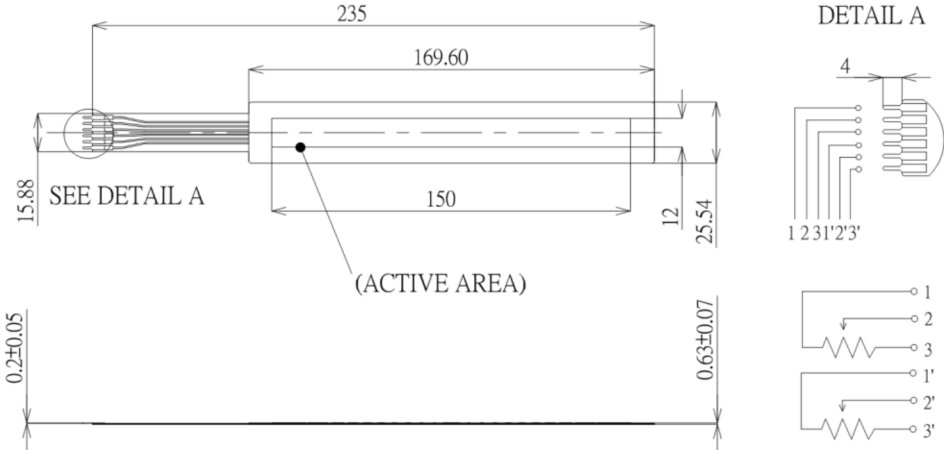
150mm Active Length

Application

✓ IoT and Logistics, Industrial and many others

Feature


✓ Dual-Touch, Slim and Flexible

Foto	Outline Drawing
	

SPECIFICATION

POSITION LIEARITY, INDEPENDENT	±3%
RESISTANCE TOLERANCE	±20%
ACTIVE LENGTH	150mm
POWER RATING	1 Watt max. @25°C
LIFE CYCLE(WITHOUT FAILURE)	>0.5 Million
OPERATING TEMPERATURE	-20°C to +70°C
IP RATING	IP65
HUMIDITY	No affect @ 95% RH, 4hrs<50°C

CONNECTOR OPTIONS

Female Contacts	Solder Tabs (pin)	Female Contact with Housing
		

Design and specifications presented here are for the standard parts only. Please kindly contact us for your special requests and ask for the current technical specifications before purchase and/or use.