

POTENZIOMETRO A CURSORE A BASSO PROFILO SERIE RAXX21F-202 E RAXX22F-202


Potenzimetro a cursore mono T60

Codice Adimpex: **BQ160424-R**

POT RA6021F-202-15C1 B100KDC**

Serie:RA6021F-202

p/n:RA6021F-202-15C1B100

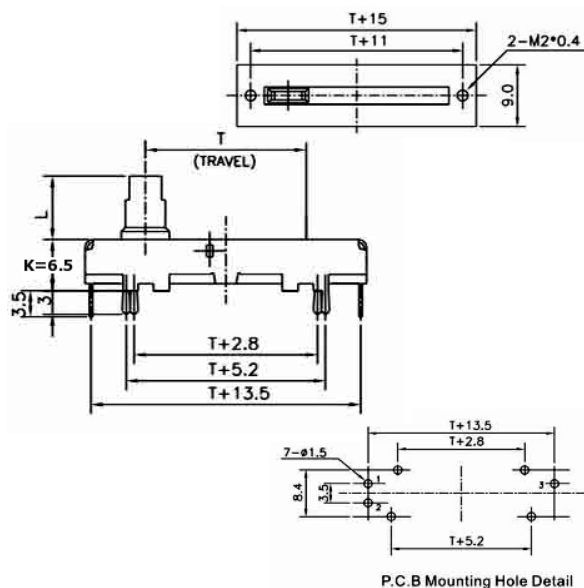

Codice Adimpex	Valore	L	Tipo leva	Curva
BQ160421	10K	15	C1	B LIN
BQ160422	20K	15	C1	B LIN
BQ160425	50K	15	C1	B LIN
BQ160430	100K	15	C1	B LIN
BQ160410	10K	15	C1	A LOG
BQ160412	20K	15	C1	A LOG
BQ160413	50K	15	C1	A LOG
BQ160414	100K	15	C1	A LOG

CARATTERISTICHE

- Valori resistivi: $1K\Omega \div 1M\Omega$
- Tolleranza: $\pm 20\%$
- Forza di scorrimento: $30 \div 250 \text{ gf} \cdot \text{cm}$
- Forza di arresto: $5 \text{ kg}/60\text{sec}$
(punto a 5mm dalla superficie di montaggio)
- Oscillazione leva: $2x(2xL)/20 \text{ mm max.}$ (L=lunghezza leva)
- Vita operativa (cicli): 15000
- Click: centrale (su richiesta)
- Forza di ritenzione del click: $20 \div 200 \text{ gf} \cdot \text{cm}$
- Resistenza d'isolamento: $> 100M\Omega$ a 250V DC
- Rigidità dielettrica: 300V AC per 1 minuto

FEATURES

- Standard resistance values: $1K\Omega \div 1M\Omega$
- Tolerance: $\pm 20\%$
- Operating force: $30 \div 250 \text{ gf} \cdot \text{cm}$
- Lever stop strength: $5 \text{ kg}/60\text{sec}$
(5mm point from mounting surface)
- Lever wobble: $2x(2xL)/20 \text{ mm max.}$ (L=lever length)
- Sliding life (cycles): 15000
- Click detent: center (on demand)
- Click slip-out force: $20 \div 200 \text{ gf} \cdot \text{cm}$
- Insulation resistance: $> 100M\Omega$ at 250V DC
- Withstanding voltage: 300V AC for 1 minute