


**CONDENSATORI ELETTROLITICI IN ALLUMINIO PER SMD A BASSA ESR**

**Serie VZH (105°C)**

Codice Adimpex: **C2212235-R**

COND EL M 220uF 35V VZH SMD 8x10

p/n: VZH221M1V0810-TR0

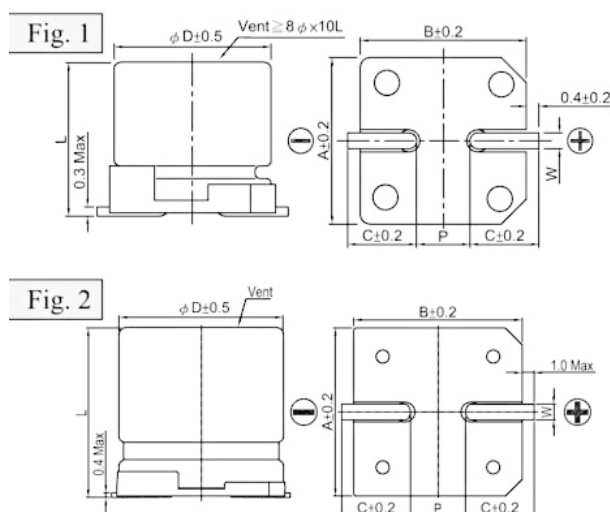

Dimensioni (mm)				
Ø D	L	A	B	C
4	5.7 ± 0.3	4.3	4.3	5.1
5	5.7 ± 0.3	5.3	5.3	5.9
6.3	5.7 ± 0.3	6.6	6.6	7.2
6.3	7.7 ± 0.3	6.6	6.6	7.2
8	10 ± 0.5	8.4	8.4	9.0
8	10.3 ± 0.5	8.4	8.4	9.0
10	7.7 ± 0.3	10.4	10.4	11.0
10	10 ± 0.5	10.4	10.4	11.0
10	10.3 ± 0.5	10.4	10.4	11.0
12.5	13.5 ± 0.5	13.0	13.0	13.7
12.5	16 ± 0.5	13.0	13.0	13.7
16	16.5 ± 0.5	17.0	17.0	18.0
16	21.5 ± 0.5	17.0	17.0	18.0
18	16.5 ± 0.5	19.0	19.0	20.0
18	21.5 ± 0.5	19.0	19.0	20.0

Tensione (V)	10	16	25	35	50	63
Capacità (uF) ± 20%	Codice Adimpex Ø D x L   Imp.   mA					
1.0					<b>C22.1050</b> 4 x 5.7   2.9   60	
2.2					<b>C22.2250</b> 4 x 5.7   2.9   60	
3.3					<b>C22.3350</b> 4 x 5.7   2.9   60	
4.7				<b>C22.4735</b> 4 x 5.7   1.35   80		<b>C22.4763</b> 5 x 5.7   1.90   70
10			<b>C2201025</b> 4 x 5.7   1.35   80	<b>C2201035</b> 5 x 5.7   0.80   150		<b>C2201063</b> 6.3 x 5.7   1.20   130
22	<b>C2202210</b> 4 x 5.7   1.35   80		<b>C2202225</b> 5 x 5.7   0.80   150		<b>C2202250</b> 6.3 x 5.7   0.88   165	<b>C2202263</b> 6.3 x 7.7   0.90   150
33	<b>C2203310</b> 5 x 5.7   0.80   150			<b>C2203335</b> 6.3 x 5.7   0.44   230	<b>C2203350</b> 6.3 x 7.7   0.68   185	
47				<b>C2204735</b> 6.3 x 5.7   0.44   230	<b>C2204750</b> 6.3 x 7.7   0.68   185	<b>C2204763</b> 8 x 10   0.50   280
100		<b>C2211016</b> 6.3x5.7   0.44   230	<b>C2211025</b> 6.3x7.7   0.36   280		<b>C2211050</b> 8x10   0.34   369	<b>C2211063</b> 10x10   0.25   450
220		<b>C2212216</b> 6.3x7.7   0.36   280		<b>C2212235</b> 10x10   0.09   670	<b>C2212250</b> 10x10.3   0.18   553	<b>C2212263</b> 12.5x13.5   0.15   700
330		<b>C2213316</b> 8 x 10   0.17   450	<b>C2213325</b> 8 x 10.3   0.17   450		<b>C2213350</b> 12.5 x 13.5   0.12   650	
470		<b>C2214716</b> 8 x 10   0.17   450	<b>C2214725</b> 10 x 10   0.09   670	<b>C2214735</b> 12.5 x 13.5   0.07   820		<b>C2214763</b> 16 x 16.5   0.082   900
1000	<b>C2221010</b> 10 x 10   0.09   670	<b>C2221016</b> 12.5 x 13.5   0.070   820	<b>C2221025</b> 12.5 x 16   0.060   950	<b>C2221035</b> 16 x 16.5   0.054   1260	<b>C2221050</b> 18 x 16.5   0.066   1500	<b>C2221063</b> 18 x 21.5   0.06   1250
2200	<b>C2222210</b> 12.5 x 16   0.060   950		<b>C2222225</b> 16 x 16.5   0.054   1260	<b>C2222235</b> 18 x 21.5   0.038   1750		
3300		<b>C2223316</b> 16 x 16.5   0.054   1260	<b>C2223325</b> 18 x 16.5   0.048   1500			
4700	<b>C2224710</b> 16 x 16.5   0.054   1260	<b>C2224716</b> 18 x 16.5   0.048   1500				
6800	<b>C2226810</b> 18 x 16.5   0.048   1500					
8200	<b>C2228210</b> 18 x 21.5   0.038   1750					

Tensione (V)	80	100
Capacità (uF) ± 20%	Codice Adimpex ø D x L   mA	
22		<b>C2202290</b> 8 x 10   1.3   130
33	<b>C2203380</b> 8 x 10   1.3   130	<b>C2203390</b> 10 x 10   0.7   200
47		<b>C2204790</b> 10 x 10   0.7   200
100	<b>C2211080</b> 10x10.3   0.7   200	<b>C2211090</b> 12.5x13.5   0.32   450
220	<b>C2212280</b> 12.5x16   0.26   550	<b>C2212290</b> 16x16.5   0.17   650
330	<b>C2213380</b> 16 x 16.5   0.17   650	<b>C2213390</b> 18 x 16.5   0.15   850
470	<b>C2214780</b> 18 x 16.5   0.15   850	<b>C2214790</b> 18 x 21.5   0.15   950

## CARATTERISTICHE

- Bassa ESR
- Gamma di temperatura:  $-55^{\circ}\text{C} \div +105^{\circ}\text{C}$
- Durata test: 2.000  $\div$  5000 ore

## FEATURES

- *Low ESR*
- *Operating temperature range:  $-55^{\circ}\text{C} \div +105^{\circ}\text{C}$*
- *Test time: 2.000  $\div$  5000 hours*