


**CONDENSATORI ELETTROLITICI RADIALI  
IN ALLUMINIO**

**Serie REA**

Codice Adimpex: **CL211090-R**

COND REA 100uF 100V P.5NS 1020

p/n: REA101M2A1020-SA0

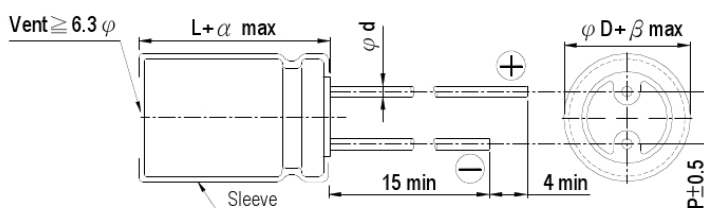

φ D	5	6.3	8	10	12.5	16
P	2.0	2.5	3.5	5.0	5.0	7.5
φ d	0.5		0.6			
α	1.0		L < 20: 1.5; 20: 2.0			
β			0.5			

Tensione (V)	16	25	35	50	63	100	
Capacità (uF) ± 20%	Codice Adimpex Ø D x L   mA						
2.2						<b>CL2.2290</b> 5 x 11   33	
3.3						<b>CL2.3390</b> 5 x 11   40	
4.7						<b>CL2.4790</b> 5 x 11   48	
10					<b>CL201063</b> 5 x 11   70	<b>CL201090</b> 6.3 x 11   80	
22				<b>CL202250</b> 5 x 11   95	<b>CL202263</b> 6.3 x 11   115	<b>CL202290</b> 6.3 x 11   115	
33				<b>CL203350</b> 5 x 11   125			
47			<b>CL204735</b> 5 x 11   130	<b>CL204750</b> 6.3 x 11   165	<b>CL204763</b> 6.3 x 11   170	<b>CL204790</b> 10 x 12.5   235	
100	<b>CL211016</b> 5 x 11   160	<b>CL211025</b> 6.3 x 11   190	<b>CL211035</b> 6.3 x 11   210	<b>CL211050</b> 8 x 11.5   260	<b>CL211063</b> 10 x 12.5   320	<b>CL211090</b> 10 x 20   370	
220	<b>CL212216</b> 6.3 x 11   260	<b>CL212225</b> 8 x 11.5   320	<b>CL212235</b> 8 x 11.5   385	<b>CL212250</b> 10 x 12.5   455	<b>CL212263</b> 10 x 16   490	<b>CL212290</b> 13 x 25   675	
330						<b>CL213390</b> 13 x 25   695	
470	<b>CL214716</b> 8 x 11.5   440	<b>CL214725</b> 10 x 12.5   545	<b>CL214735</b> 10 x 16   740	<b>CL214750</b> 10 x 20   755	<b>CL214763</b> 12.5 x 20   900	<b>CL214790</b> 16 x 25   910	
1000	<b>CL221016</b> 10 x 16   785	<b>CL221025</b> 10 x 20   955	<b>CL221035</b> 12.5 x 20   1145	<b>CL221050</b> 12.5 x 25   1340	<b>CL221063</b> 16 x 25   1560	<b>CL221090</b> 18 x 40   1820	
2200	<b>CL222216</b> 12.5 x 20   1295	<b>CL222225</b> 12.5 x 25   1540	<b>CL222235</b> 16 x 25   1785	<b>CL222250</b> 16 x 35.5   1960	<b>CL222263</b> 22 x 40   2750	<b>CL222285</b> 22 x 40   2800	<b>CL222290</b> 25 x 45   3100
3300	<b>CL223316</b> 13 x 25   1655	<b>CL223325</b> 16 x 25   1800	<b>CL223335</b> 16 x 35.5   2275	<b>CL223350</b> 18 x 35.5   2500			
4700	<b>CL224716</b> 16 x 25   2090	<b>CL224725</b> 16 x 32   2420	<b>CL224735</b> 18 x 35.5   2700	<b>CL224750</b> 22 x 40   3040	<b>CL224763</b> 22 x 50   3000		
6800		<b>CL226825</b> 18 x 36   2880					
10000	<b>CL231016</b> 18 x 36   2700	<b>CL231025</b> 22 x 40   3440					

## CARATTERISTICHE

- Tipo standard per uso generico
- Gamma di temperatura:  $-40^{\circ}\text{C} \div +85^{\circ}\text{C}$
- Durata test: 2.000  $\div$  3000 ore

## FEATURES

- *Standard type for general purpose*
- *Operating temperature range:  $-40^{\circ}\text{C} \div +85^{\circ}\text{C}$*
- *Test time: 2.000  $\div$  3000 hours*