


**CONDENSATORI ELETTROLITICI
RADIALI IN ALLUMINIO**

Serie REA

Codice Adimpex: **CL222290-R**

COND REA 2200uF 100V BULK 2545 #

p/n: REA222M2A2545---0

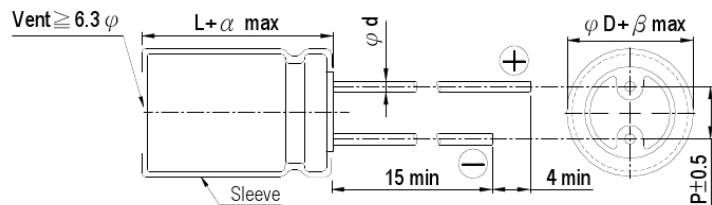

| | | | | | | |
|-----|-----|-----|--------------|-----|---------|-----|
| φ D | 5 | 6.3 | 8 | 10 | 12.5 | 16 |
| P | 2.0 | 2.5 | 3.5 | 5.0 | 5.0 | 7.5 |
| φ d | 0.5 | | 0.6 | | | |
| α | 1.0 | | L < 20: 1.5; | | 20: 2.0 | |
| β | 0.5 | | | | | |

| Tensione (V) | 16 | 25 | 35 | 50 | 63 | 100 | |
|---------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|------------------------------------|------------------------------------|-----------------------------------|
| Capacità (uF) ± 20% | Codice Adimpex Ø D x L mA | | | | | | |
| 2.2 | | | | | | CL2.2290 5 x 11 33 | |
| 3.3 | | | | | | CL2.3390 5 x 11 40 | |
| 4.7 | | | | | | CL2.4790 5 x 11 48 | |
| 10 | | | | | CL201063 5 x 11 70 | CL201090 6.3 x 11 80 | |
| 22 | | | | CL202250 5 x 11 95 | CL202263 6.3 x 11 115 | CL202290 6.3 x 11 115 | |
| 33 | | | | CL203350 5 x 11 125 | | | |
| 47 | | | CL204735 5 x 11 130 | CL204750 6.3 x 11 165 | CL204763 6.3 x 11 170 | CL204790 10 x 12.5 235 | |
| 100 | CL211016 5 x 11 160 | CL211025 6.3 x 11 190 | CL211035 6.3 x 11 210 | CL211050 8 x 11.5 260 | CL211063 10 x 12.5 320 | CL211090 10 x 20 370 | |
| 220 | CL212216 6.3 x 11 260 | CL212225 8 x 11.5 320 | CL212235 8 x 11.5 385 | CL212250 10 x 12.5 455 | CL212263 10 x 16 490 | CL212290 13 x 25 675 | |
| 330 | | | | | | CL213390 13 x 25 695 | |
| 470 | CL214716 8 x 11.5 440 | CL214725 10 x 12.5 545 | CL214735 10 x 16 740 | CL214750 10 x 20 755 | CL214763 12.5 x 20 900 | CL214790 16 x 25 910 | |
| 1000 | CL221016 10 x 16 785 | CL221025 10 x 20 955 | CL221035 12.5 x 20 1145 | CL221050 12.5 x 25 1340 | CL221063 16 x 25 1560 | CL221090 18 x 40 1820 | |
| 2200 | CL222216 12.5 x 20 1295 | CL222225 12.5 x 25 1540 | CL222235 16 x 25 1785 | CL222250 16 x 35.5 1960 | CL222263 22 x 40 2750 | CL222285 22 x 40 2800 | CL222290 25 x 45 3100 |
| 3300 | CL223316 13 x 25 1655 | CL223325 16 x 25 1800 | CL223335 16 x 35.5 2275 | CL223350 18 x 35.5 2500 | | | |
| 4700 | CL224716 16 x 25 2090 | CL224725 16 x 32 2420 | CL224735 18 x 35.5 2700 | CL224750 22 x 40 3040 | CL224763 22 x 50 3000 | | |
| 6800 | | CL226825 18 x 36 2880 | | | | | |
| 10000 | CL231016 18 x 36 2700 | CL231025 22 x 40 3440 | | | | | |

CARATTERISTICHE

- Tipo standard per uso generico
- Gamma di temperatura: $-40^{\circ}\text{C} \div +85^{\circ}\text{C}$
- Durata test: 2.000 \div 3000 ore

FEATURES

- *Standard type for general purpose*
- *Operating temperature range: $-40^{\circ}\text{C} \div +85^{\circ}\text{C}$*
- *Test time: 2.000 \div 3000 hours*