


## CONDENSATORI ELETTROLITICI RADIALI IN ALLUMINIO

Serie RGA (105°C)

Codice Adimpex: **CL512235-R**

C.105RGA 220uF 35V 3.5NS 8x11

p/n:RGA221M1V0811-SA0

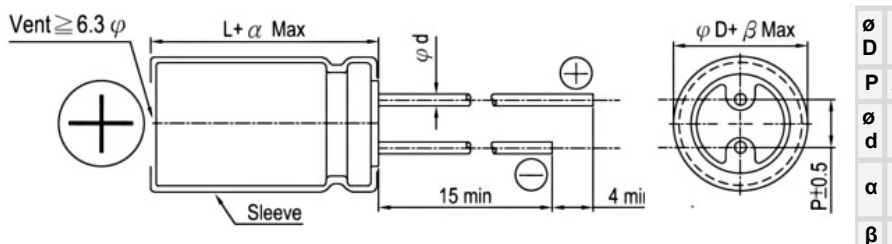

Tensione (V)	16	25	35	50	63	100
Capacità (uF) ± 20%	Codice Adimpex ø D x L   mA					
2.2						<b>CL5.2290</b> 5 x 11   30
3.3						<b>CL5.3390</b> 5 x 11   31
4.7					<b>CL5.4763</b> 5 x 11   36	<b>CL5.4790</b> 5 x 11   36
10					<b>CL501063</b> 5 x 11   54	<b>CL501090</b> 6.3 x 11   54
22			<b>CL502235</b> 5 x 11   71	<b>CL502250</b> 5 x 11   78	<b>CL502263</b> 6.3 x 11   86	<b>CL502290</b> 8 x 11.5   99
47			<b>CL504735</b> 5 x 11   90	<b>CL504750</b> 6.3 x 11   120	<b>CL504763</b> 6.3 x 11   130	<b>CL504790</b> 10 x 12.5   165
100	<b>CL511016</b> 5 x 11   110	<b>CL511025</b> 6.3 x 11   142	<b>CL511035</b> 6.3 x 11   150	<b>CL511050</b> 8 x 11.5   188	<b>CL511063</b> 10 x 12.5   235	<b>CL511090</b> 10 x 20   265
220	<b>CL512216</b> 6.3 x 11   190	<b>CL512225</b> 8 x 11.5   236	<b>CL512235</b> 8 x 11.5   270	<b>CL512250</b> 10 x 16   300	<b>CL512263</b> 10 x 16   335	<b>CL512290</b> 12.5 x 25   440
330		<b>CL513325</b> 8 x 11.5   310	<b>CL513335</b> 10 x 12.5   350	<b>CL513350</b> 10 x 16   410	<b>CL513363</b> 10 x 20   510	<b>CL513390</b> 16 x 25   620
470	<b>CL514716</b> 8 x 11.5   310	<b>CL514725</b> 10 x 12.5   380	<b>CL514735</b> 10 x 16   460	<b>CL514750</b> 10 x 20   530	<b>CL514763</b> 12.5 x 20   640	<b>CL514790</b> 16 x 31.5   715
1000	<b>CL521016</b> 10 x 16   560	<b>CL521025</b> 10 x 20   680	<b>CL521035</b> 12.5 x 20   810	<b>CL521050</b> 12.5 x 25   950	<b>CL521063</b> 16 x 25   930	<b>CL521090</b> 18 x 40   1275
2200	<b>CL522216</b> 12.5 x 16   780	<b>CL522225</b> 12.5 x 25   1110	<b>CL522235</b> 16 x 25   1260	<b>CL522250</b> 16 x 35.5   1470	<b>CL522263</b> 18 x 40   2280	
3300	<b>CL523316</b> 12.5 x 25   1170	<b>CL523325</b> 16 x 25   1440	<b>CL523335</b> 16 x 35.5   1570	<b>CL523350</b> 18 x 35.5   1770	<b>CL523363</b> 22 x 40   2510	
4700	<b>CL524716</b> 16 x 20   1185	<b>CL524725</b> 16 x 31.5   1650	<b>CL524735</b> 18 x 35.5   1900	<b>CL524750</b> 22 x 35   2200		
10000	<b>CL531016</b> 18 x 35.5   2640					
Tensione (V)	160	200	250	350	400	450
Capacità (uF) ± 20%	Codice Adimpex ø D x L   mA					

1.0				<b>CL7.1035</b> 6.3 x 11   23		<b>CL7.1045</b> 8 x 11.5   27
2.2			<b>CL7.2225</b> 6.3 x 11   35	<b>CL7.2235</b> 8 x 11   35		<b>CL7.2245</b> 10 x 12   48
3.3					<b>CL7.3341</b> 8 x 11.5   45	
4.7			<b>CL7.4725</b> 8 x 11.5   45	<b>CL7.4735</b> 10 x 16   65		<b>CL7.4745</b> 10 x 20   70
10			<b>CL701025</b> 10 x 16   95	<b>CL701035</b> 10 x 16   100		<b>CL701045</b> 13 x 20   105
22	<b>CL702216</b> 10 x 20   130		<b>CL702225</b> 13 x 20   155	<b>CL702235</b> 13 x 25   235		<b>CL702245</b> 16 x 25   190
33	<b>CL703316</b> 10 x 16   150	<b>CL703320</b> 10 x 20   170	<b>CL703325</b> 12.5 x 16   175	<b>CL703335</b> 12.5 x 25   215	<b>CL703340</b> 16 x 20   225	<b>CL703345</b> 16 x 20   225
47			<b>CL704725</b> 13 x 25   250	<b>CL704735</b> 16 x 32   305	<b>CL704740</b> 16 x 36   340	<b>CL704745</b> 16 x 36   330
68	<b>CL706816</b> 12.5 x 20   275	<b>CL706820</b> 12.5 x 20   265	<b>CL706825</b> 16 x 20   320	<b>CL706835</b> 18 x 25   360	<b>CL706840</b> 18 x 25   360	<b>CL706845</b> 16 x 35.5   400
100	<b>CL711016</b> 16 x 25   380		<b>CL711025</b> 16 x 36   495			
150	<b>CL711516</b> 16 x 25   470	<b>CL711520</b> 18 x 20   510	<b>CL711525</b> 16 x 31.5   550	<b>CL711535</b> 18 x 40   600	<b>CL711540</b> 22 x 40   730	<b>CL711545</b> 22 x 40   770
220	<b>CL712216</b> 16 x 31.5   660	<b>CL712220</b> 18 x 36   790				
330	<b>CL713316</b> 18 x 35.5   820					

## CARATTERISTICHE

- Tipo standard per uso generico
- Gamma di temperatura: -40°C ÷ +105°C
- Durata test: 2000 ore

## FEATURES

- *Standard series for general purpose*
- *Operating temperature range: -40°C ÷ +105°C*
- *Test time: 2000 hours*