


## CONDENSATORI ELETTROLITICI RADIALI IN ALLUMINIO

Serie RGA (105°C)

Codice Adimpex: **CL522225-R**

C.105RGA 2200uF 25V P5NS 1325

p/n:RGA222M1E1325-SA0

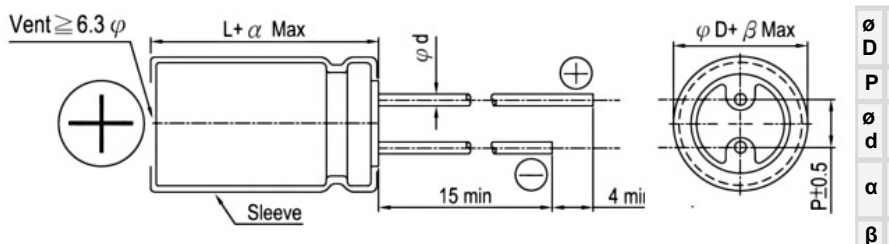

| Tensione (V)        | 16                                  | 25                                  | 35                                  | 50                                  | 63                                 | 100                                |
|---------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|------------------------------------|------------------------------------|
| Capacità (uF) ± 20% | Codice Adimpex<br>∅ D x L   mA      |                                     |                                     |                                     |                                    |                                    |
| 2.2                 |                                     |                                     |                                     |                                     |                                    | <b>CL5.2290</b><br>5 x 11   30     |
| 3.3                 |                                     |                                     |                                     |                                     |                                    | <b>CL5.3390</b><br>5 x 11   31     |
| 4.7                 |                                     |                                     |                                     |                                     | <b>CL5.4763</b><br>5 x 11   36     | <b>CL5.4790</b><br>5 x 11   36     |
| 10                  |                                     |                                     |                                     |                                     | <b>CL501063</b><br>5 x 11   54     | <b>CL501090</b><br>6.3 x 11   54   |
| 22                  |                                     |                                     | <b>CL502235</b><br>5 x 11   71      | <b>CL502250</b><br>5 x 11   78      | <b>CL502263</b><br>6.3 x 11   86   | <b>CL502290</b><br>8 x 11.5   99   |
| 47                  |                                     |                                     | <b>CL504735</b><br>5 x 11   90      | <b>CL504750</b><br>6.3 x 11   120   | <b>CL504763</b><br>6.3 x 11   130  | <b>CL504790</b><br>10 x 12.5   165 |
| 100                 | <b>CL511016</b><br>5 x 11   110     | <b>CL511025</b><br>6.3 x 11   142   | <b>CL511035</b><br>6.3 x 11   150   | <b>CL511050</b><br>8 x 11.5   188   | <b>CL511063</b><br>10 x 12.5   235 | <b>CL511090</b><br>10 x 20   265   |
| 220                 | <b>CL512216</b><br>6.3 x 11   190   | <b>CL512225</b><br>8 x 11.5   236   | <b>CL512235</b><br>8 x 11.5   270   | <b>CL512250</b><br>10 x 16   300    | <b>CL512263</b><br>10 x 16   335   | <b>CL512290</b><br>12.5 x 25   440 |
| 330                 |                                     | <b>CL513325</b><br>8 x 11.5   310   | <b>CL513335</b><br>10 x 12.5   350  | <b>CL513350</b><br>10 x 16   410    | <b>CL513363</b><br>10 x 20   510   | <b>CL513390</b><br>16 x 25   620   |
| 470                 | <b>CL514716</b><br>8 x 11.5   310   | <b>CL514725</b><br>10 x 12.5   380  | <b>CL514735</b><br>10 x 16   460    | <b>CL514750</b><br>10 x 20   530    | <b>CL514763</b><br>12.5 x 20   640 | <b>CL514790</b><br>16 x 31.5   715 |
| 1000                | <b>CL521016</b><br>10 x 16   560    | <b>CL521025</b><br>10 x 20   680    | <b>CL521035</b><br>12.5 x 20   810  | <b>CL521050</b><br>12.5 x 25   950  | <b>CL521063</b><br>16 x 25   930   | <b>CL521090</b><br>18 x 40   1275  |
| 2200                | <b>CL522216</b><br>12.5 x 16   780  | <b>CL522225</b><br>12.5 x 25   1110 | <b>CL522235</b><br>16 x 25   1260   | <b>CL522250</b><br>16 x 35.5   1470 | <b>CL522263</b><br>18 x 40   2280  |                                    |
| 3300                | <b>CL523316</b><br>12.5 x 25   1170 | <b>CL523325</b><br>16 x 25   1440   | <b>CL523335</b><br>16 x 35.5   1570 | <b>CL523350</b><br>18 x 35.5   1770 | <b>CL523363</b><br>22 x 40   2510  |                                    |
| 4700                | <b>CL524716</b><br>16 x 20   1185   | <b>CL524725</b><br>16 x 31.5   1650 | <b>CL524735</b><br>18 x 35.5   1900 | <b>CL524750</b><br>22 x 35   2200   |                                    |                                    |
| 10000               | <b>CL531016</b><br>18 x 35.5   2640 |                                     |                                     |                                     |                                    |                                    |

| Tensione (V)        | 160                            | 200 | 250 | 350 | 400 | 450 |
|---------------------|--------------------------------|-----|-----|-----|-----|-----|
| Capacità (uF) ± 20% | Codice Adimpex<br>∅ D x L   mA |     |     |     |     |     |

|     |                                    |                                    |                                    |                                    |                                  |                                    |
|-----|------------------------------------|------------------------------------|------------------------------------|------------------------------------|----------------------------------|------------------------------------|
| 1.0 |                                    |                                    |                                    | <b>CL7.1035</b><br>6.3 x 11   23   |                                  | <b>CL7.1045</b><br>8 x 11.5   27   |
| 2.2 |                                    |                                    | <b>CL7.2225</b><br>6.3 x 11   35   | <b>CL7.2235</b><br>8 x 11   35     |                                  | <b>CL7.2245</b><br>10 x 12   48    |
| 3.3 |                                    |                                    |                                    |                                    | <b>CL7.3341</b><br>8 x 11.5   45 |                                    |
| 4.7 |                                    |                                    | <b>CL7.4725</b><br>8 x 11.5   45   | <b>CL7.4735</b><br>10 x 16   65    |                                  | <b>CL7.4745</b><br>10 x 20   70    |
| 10  |                                    |                                    | <b>CL701025</b><br>10 x 16   95    | <b>CL701035</b><br>10 x 16   100   |                                  | <b>CL701045</b><br>13 x 20   105   |
| 22  | <b>CL702216</b><br>10 x 20   130   |                                    | <b>CL702225</b><br>13 x 20   155   | <b>CL702235</b><br>13 x 25   235   |                                  | <b>CL702245</b><br>16 x 25   190   |
| 33  | <b>CL703316</b><br>10 x 16   150   | <b>CL703320</b><br>10 x 20   170   | <b>CL703325</b><br>12.5 x 16   175 | <b>CL703335</b><br>12.5 x 25   215 | <b>CL703340</b><br>16 x 20   225 | <b>CL703345</b><br>16 x 20   225   |
| 47  |                                    |                                    | <b>CL704725</b><br>13 x 25   250   | <b>CL704735</b><br>16 x 32   305   | <b>CL704740</b><br>16 x 36   340 | <b>CL704745</b><br>16 x 36   330   |
| 68  | <b>CL706816</b><br>12.5 x 20   275 | <b>CL706820</b><br>12.5 x 20   265 | <b>CL706825</b><br>16 x 20   320   | <b>CL706835</b><br>18 x 25   360   | <b>CL706840</b><br>18 x 25   360 | <b>CL706845</b><br>16 x 35.5   400 |
| 100 | <b>CL711016</b><br>16 x 25   380   |                                    | <b>CL711025</b><br>16 x 36   495   |                                    |                                  |                                    |
| 150 | <b>CL711516</b><br>16 x 25   470   | <b>CL711520</b><br>18 x 20   510   | <b>CL711525</b><br>16 x 31.5   550 | <b>CL711535</b><br>18 x 40   600   | <b>CL711540</b><br>22 x 40   730 | <b>CL711545</b><br>22 x 40   770   |
| 220 | <b>CL712216</b><br>16 x 31.5   660 | <b>CL712220</b><br>18 x 36   790   |                                    |                                    |                                  |                                    |
| 330 | <b>CL713316</b><br>18 x 35.5   820 |                                    |                                    |                                    |                                  |                                    |

## CARATTERISTICHE

- Tipo standard per uso generico
- Gamma di temperatura: -40°C ÷ +105°C
- Durata test: 2000 ore

## FEATURES

- *Standard series for general purpose*
- *Operating temperature range: -40°C ÷ +105°C*
- *Test time: 2000 hours*