


**CONDENSATORI Elettrolitici
RADIALI IN ALLUMINIO**

Serie RGA (105°C)

Codice Adimpex: **CL523316-R**

C.105RGA 3300uF 16V P5NS 1325

p/n:RGA332M1C1325-SA0

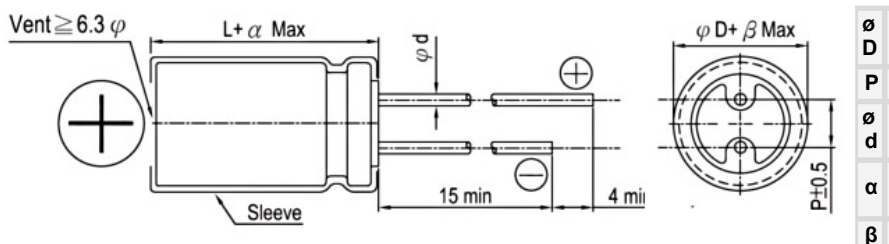

Tensione (V)	16	25	35	50	63	100
Capacità (uF) ± 20%	Codice Adimpex ∅ D x L mA					
2.2						CL5.2290 5 x 11 30
3.3						CL5.3390 5 x 11 31
4.7					CL5.4763 5 x 11 36	CL5.4790 5 x 11 36
10					CL501063 5 x 11 54	CL501090 6.3 x 11 54
22			CL502235 5 x 11 71	CL502250 5 x 11 78	CL502263 6.3 x 11 86	CL502290 8 x 11.5 99
47			CL504735 5 x 11 90	CL504750 6.3 x 11 120	CL504763 6.3 x 11 130	CL504790 10 x 12.5 165
100	CL511016 5 x 11 110	CL511025 6.3 x 11 142	CL511035 6.3 x 11 150	CL511050 8 x 11.5 188	CL511063 10 x 12.5 235	CL511090 10 x 20 265
220	CL512216 6.3 x 11 190	CL512225 8 x 11.5 236	CL512235 8 x 11.5 270	CL512250 10 x 16 300	CL512263 10 x 16 335	CL512290 12.5 x 25 440
330		CL513325 8 x 11.5 310	CL513335 10 x 12.5 350	CL513350 10 x 16 410	CL513363 10 x 20 510	CL513390 16 x 25 620
470	CL514716 8 x 11.5 310	CL514725 10 x 12.5 380	CL514735 10 x 16 460	CL514750 10 x 20 530	CL514763 12.5 x 20 640	CL514790 16 x 31.5 715
1000	CL521016 10 x 16 560	CL521025 10 x 20 680	CL521035 12.5 x 20 810	CL521050 12.5 x 25 950	CL521063 16 x 25 930	CL521090 18 x 40 1275
2200	CL522216 12.5 x 16 780	CL522225 12.5 x 25 1110	CL522235 16 x 25 1260	CL522250 16 x 35.5 1470	CL522263 18 x 40 2280	
3300	CL523316 12.5 x 25 1170	CL523325 16 x 25 1440	CL523335 16 x 35.5 1570	CL523350 18 x 35.5 1770	CL523363 22 x 40 2510	
4700	CL524716 16 x 20 1185	CL524725 16 x 31.5 1650	CL524735 18 x 35.5 1900	CL524750 22 x 35 2200		
10000	CL531016 18 x 35.5 2640					
Tensione (V)	160	200	250	350	400	450
Capacità (uF) ± 20%	Codice Adimpex ∅ D x L mA					

1.0				CL7.1035 6.3 x 11 23		CL7.1045 8 x 11.5 27
2.2			CL7.2225 6.3 x 11 35	CL7.2235 8 x 11 35		CL7.2245 10 x 12 48
3.3					CL7.3341 8 x 11.5 45	
4.7			CL7.4725 8 x 11.5 45	CL7.4735 10 x 16 65		CL7.4745 10 x 20 70
10			CL701025 10 x 16 95	CL701035 10 x 16 100		CL701045 13 x 20 105
22	CL702216 10 x 20 130		CL702225 13 x 20 155	CL702235 13 x 25 235		CL702245 16 x 25 190
33	CL703316 10 x 16 150	CL703320 10 x 20 170	CL703325 12.5 x 16 175	CL703335 12.5 x 25 215	CL703340 16 x 20 225	CL703345 16 x 20 225
47			CL704725 13 x 25 250	CL704735 16 x 32 305	CL704740 16 x 36 340	CL704745 16 x 36 330
68	CL706816 12.5 x 20 275	CL706820 12.5 x 20 265	CL706825 16 x 20 320	CL706835 18 x 25 360	CL706840 18 x 25 360	CL706845 16 x 35.5 400
100	CL711016 16 x 25 380		CL711025 16 x 36 495			
150	CL711516 16 x 25 470	CL711520 18 x 20 510	CL711525 16 x 31.5 550	CL711535 18 x 40 600	CL711540 22 x 40 730	CL711545 22 x 40 770
220	CL712216 16 x 31.5 660	CL712220 18 x 36 790				
330	CL713316 18 x 35.5 820					

CARATTERISTICHE

- Tipo standard per uso generico
- Gamma di temperatura: -40°C ÷ +105°C
- Durata test: 2000 ore

FEATURES

- *Standard series for general purpose*
- *Operating temperature range: -40°C ÷ +105°C*
- *Test time: 2000 hours*