


CONDENSATORI X2
Passo 10.0 mm 275V AC

 Codice Adimpex: **CNA00823-R**

COND X2 TS08S/FC K 82K 275V p10 *

Serie: TS08S

p/n: TS08S-275V

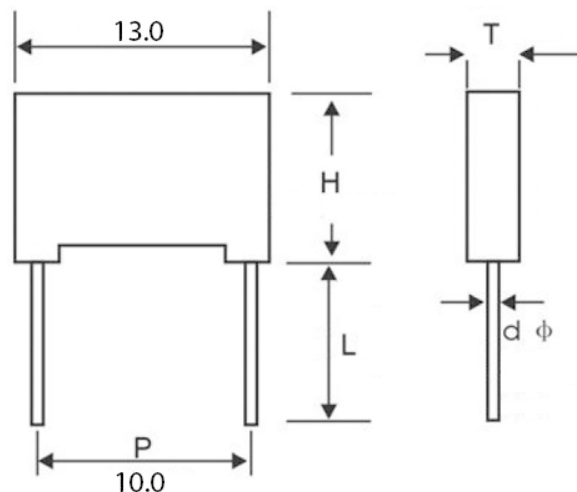

Codice Adimpex		μ F	H	T	d
L=6	L=20				
CNA.0473	CNA.0474	0.0047	11.0	5.0	0.6
CNA.0563	CNA.0564	0.0056	11.0	5.0	0.6
CNA.0683	CNA.0684	0.0068	11.0	5.0	0.6
CNA.0823	CNA.0824	0.0082	11.0	5.0	0.6
CNA00103	CNA00104	0.01	11.0	5.0	0.6
CNA00123	CNA00124	0.012	11.0	5.0	0.6
CNA00153	CNA00154	0.015	11.0	5.0	0.6
CNA00183	CNA00184	0.018	11.0	5.0	0.6
CNA00223	CNA00224	0.022	11.0	5.0	0.6

Codice Adimpex		μ F	H	T	d
L=6	L=20				
CNA00273	CNA00274	0.027	11.0	5.0	0.6
CNA00333	CNA00334	0.033	11.0	5.0	0.6
CNA00393	CNA00394	0.039	11.0	5.0	0.6
CNA00471	CNA00472	0.047	11.0	5.0	0.6
CNA00563	CNA00564	0.056	12.0	6.0	0.6
CNA00683	CNA00684	0.068	12.0	6.0	0.6
CNA00823	CNA00824	0.082	12.0	6.0	0.6
CNA01101	CNA01102	0.1	12.0	6.0	0.6

CARATTERISTICHE

- Dielettrico: film polipropilene
- Avvolgimento: tipo non induttivo
- Rivestimento: termoplastico, sigillato con resina epossidica; box resistente a solventi ed alla fiamma secondo UL94V-0
- Tensione nominale: **275V AC; 310V AC**
- Tolleranza: $\pm 10\%$ (K) standard
- Temperatura di lavoro: $-40^{\circ}\text{C} \div 110^{\circ}\text{C}$

FEATURES

- *Dielectric: polypropylene film*
- *Winding: non-inductive type*
- *Protection: plastic case, thermosetting resin filled; box material is solvent resistant and flame retardant according to UL94V-0*
- *Nominal voltage: 275V AC; 310V AC*
- *Tolerance: $\pm 10\%$ (K) standard*
- *Operating temperature: $-40^{\circ}\text{C} \div 110^{\circ}\text{C}$*

