

**CONDENSATORI X2**


**Passo 22.5 mm 275V AC**

Codice Adimpex: **CNA01334-R**

COND X2 TS08S/FL K 330K 275V p22,5 \*\*

Serie: TS08S

p/n: TS08S-275V

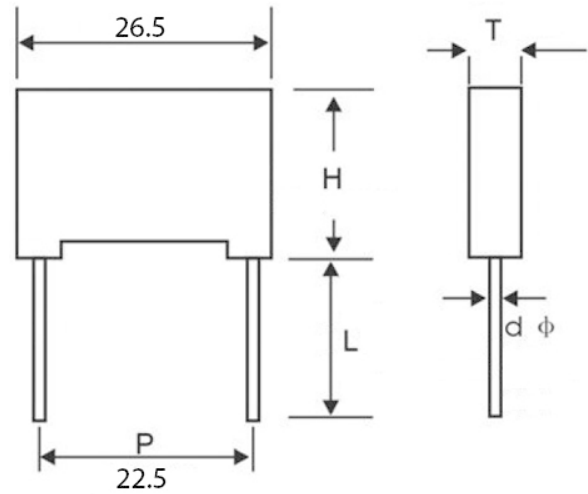

Codice Adimpex		μF	H	T	d
L=6	L=20				
CNA01157	CNA01158	0.15	16.5	7.0	0.8
CNA01187	CNA01188	0.18	16.5	7.0	0.8
CNA01225	CNA01226	0.22	16.5	7.0	0.8
CNA01277	CNA01288	0.27	16.5	7.0	0.8
CNA01333	<b>CNA01334</b>	0.33	16.5	7.0	0.8

Codice Adimpex		μF	H	T	d
L=6	L=20				
CNA01476	CNA01477	0.47	19.0	10.0	0.8
CNA01567	CNA01568	0.56	19.0	10.0	0.8
CNA01687	CNA01688	0.68	19.0	10.0	0.8
CNA01827	CNA01828	0.82	19.0	10.0	0.8
CNA02103	CNA02104	1.00	19.0	10.0	0.8

**CARATTERISTICHE**

- Dielettrico: film polipropilene
- Avvolgimento: tipo non induttivo
- Rivestimento: termoplastico, sigillato con resina epossidica; box resistente a solventi ed alla fiamma secondo UL94V-0
- Tensione nominale: **275V AC; 310V AC**
- Tolleranza: ± 10% (K) standard
- Temperatura di lavoro: -40°C ÷ 110°C

**FEATURES**

- *Dielectric: polypropylene film*
- *Winding: non-inductive type*
- *Protection: plastic case, thermosetting resin filled; box material is solvent resistant and flame retardant according to UL94V-0*
- *Nominal voltage: 275V AC; 310V AC*
- *Tolerance: ± 10% (K) standard*
- *Operating temperature: -40°C ÷ 110°C*

