

## CONDENSATORI X2


Passo 22.5 mm 275V AC

Codice Adimpex: **CNA01477-R**

COND X2 TS08S/FL K 470K 275V p22,5 \*

Serie: TS08S

p/n: TS08S-275V

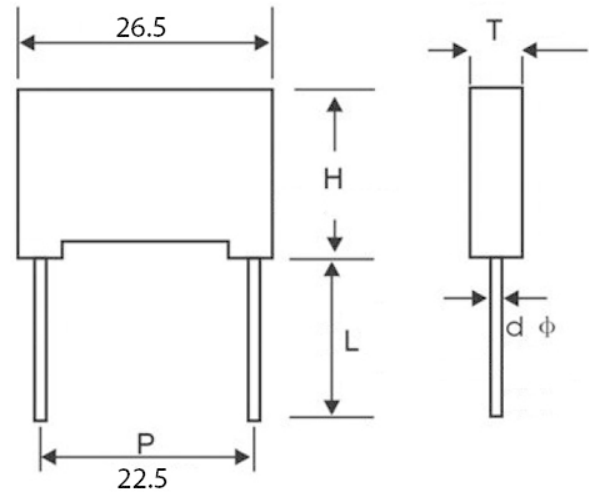

| Codice Adimpex |          | μF   | H    | T   | d   |
|----------------|----------|------|------|-----|-----|
| L=6            | L=20     |      |      |     |     |
| CNA01157       | CNA01158 | 0.15 | 16.5 | 7.0 | 0.8 |
| CNA01187       | CNA01188 | 0.18 | 16.5 | 7.0 | 0.8 |
| CNA01225       | CNA01226 | 0.22 | 16.5 | 7.0 | 0.8 |
| CNA01277       | CNA01288 | 0.27 | 16.5 | 7.0 | 0.8 |
| CNA01333       | CNA01334 | 0.33 | 16.5 | 7.0 | 0.8 |

| Codice Adimpex |                 | μF   | H    | T    | d   |
|----------------|-----------------|------|------|------|-----|
| L=6            | L=20            |      |      |      |     |
| CNA01476       | <b>CNA01477</b> | 0.47 | 19.0 | 10.0 | 0.8 |
| CNA01567       | CNA01568        | 0.56 | 19.0 | 10.0 | 0.8 |
| CNA01687       | CNA01688        | 0.68 | 19.0 | 10.0 | 0.8 |
| CNA01827       | CNA01828        | 0.82 | 19.0 | 10.0 | 0.8 |
| CNA02103       | CNA02104        | 1.00 | 19.0 | 10.0 | 0.8 |

## CARATTERISTICHE

- Dielettrico: film polipropilene
- Avvolgimento: tipo non induttivo
- Rivestimento: termoplastico, sigillato con resina epossidica; box resistente a solventi ed alla fiamma secondo UL94V-0
- Tensione nominale: **275V AC; 310V AC**
- Tolleranza: ± 10% (K) standard
- Temperatura di lavoro: -40°C ÷ 110°C

## FEATURES

- *Dielectric: polypropylene film*
- *Winding: non-inductive type*
- *Protection: plastic case, thermosetting resin filled; box material is solvent resistant and flame retardant according to UL94V-0*
- *Nominal voltage: 275V AC; 310V AC*
- *Tolerance: ± 10% (K) standard*
- *Operating temperature: -40°C ÷ 110°C*

