

## CONDENSATORI X2


Passo 22.5 mm 275V AC

Codice Adimpex: **CNA01567-R**

COND X2 TS08S/FC K 560K 275V p22,5 \*

Serie: TS08S

p/n: TS08S-275V

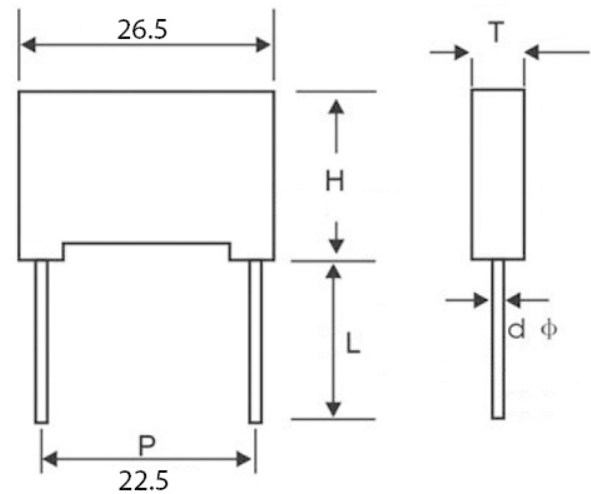

Codice Adimpex		μF	H	T	d
L=6	L=20				
CNA01157	CNA01158	0.15	16.5	7.0	0.8
CNA01187	CNA01188	0.18	16.5	7.0	0.8
CNA01225	CNA01226	0.22	16.5	7.0	0.8
CNA01277	CNA01288	0.27	16.5	7.0	0.8
CNA01333	CNA01334	0.33	16.5	7.0	0.8

Codice Adimpex		μF	H	T	d
L=6	L=20				
CNA01476	CNA01477	0.47	19.0	10.0	0.8
<b>CNA01567</b>	<b>CNA01568</b>	0.56	19.0	10.0	0.8
CNA01687	CNA01688	0.68	19.0	10.0	0.8
CNA01827	CNA01828	0.82	19.0	10.0	0.8
CNA02103	CNA02104	1.00	19.0	10.0	0.8

## CARATTERISTICHE

- Dielettrico: film polipropilene
- Avvolgimento: tipo non induttivo
- Rivestimento: termoplastico, sigillato con resina epossidica; box resistente a solventi ed alla fiamma secondo UL94V-0
- Tensione nominale: **275V AC; 310V AC**
- Tolleranza: ± 10% (K) standard
- Temperatura di lavoro: -40°C ÷ 110°C

## FEATURES

- *Dielectric: polypropylene film*
- *Winding: non-inductive type*
- *Protection: plastic case, thermosetting resin filled; box material is solvent resistant and flame retardant according to UL94V-0*
- *Nominal voltage: 275V AC; 310V AC*
- *Tolerance: ± 10% (K) standard*
- *Operating temperature: -40°C ÷ 110°C*

