


Condensatori in poliestere, polipropilene ed X2

POLIESTERE (DIP COATED) SERIE TS02 400VDC 100KPF PASSO 10MM

COND TS02-FL K 100K 400V p10

Codice Adimpex: **CNA11104-R**

P/N: **TS02 10% L.L.=20.0mm**

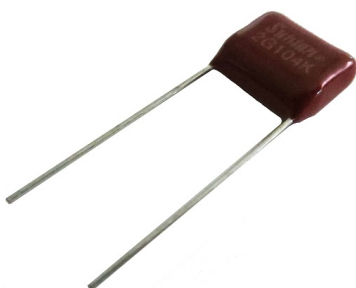

METALLIZED POLYESTER FILM CAPACITOR *Sanyo*

TS02

SPECIFICATIONS

NONINDUCTIVE, SELF-HEALING, DIFFERENTIAL, HIGH MOISTURE RESISTANCE

Capacitance: 100KpF ±10%
 Voltage: 400VDC
 Temperature: -40°C to +85°C
 Life: 10,000 hours at 105°C, 100% RH
 Dissipation Factor: ≤0.002

Diagram showing the capacitor's physical dimensions and electrical connections.

Capacitance (pF)	Voltage (VDC)	Temperature (°C)	Life (hours)	Dissipation Factor
10	400	-40 to +85	10,000	≤0.002
22	400	-40 to +85	10,000	≤0.002
33	400	-40 to +85	10,000	≤0.002
47	400	-40 to +85	10,000	≤0.002
68	400	-40 to +85	10,000	≤0.002
100	400	-40 to +85	10,000	≤0.002
150	400	-40 to +85	10,000	≤0.002
220	400	-40 to +85	10,000	≤0.002
330	400	-40 to +85	10,000	≤0.002
470	400	-40 to +85	10,000	≤0.002
680	400	-40 to +85	10,000	≤0.002
1000	400	-40 to +85	10,000	≤0.002

Caratteristiche Tecniche:

Passo:	10 mm
Capacità (F):	100KpF
Tensione (VAC-VDC):	400VDC
Tipologia:	Poliestere
Gamma:	Radiale