


Condensatori in poliestere, polipropilene ed X2

**X2 SERIE TS08H 310VAC 10KPF PASSO 15MM**

X2 TS08H/FC K 10K 310V p15 18x5x11

Codice Adimpex: **CNB00270H**

P/N: **TS08H0A9103KAB0ESR**

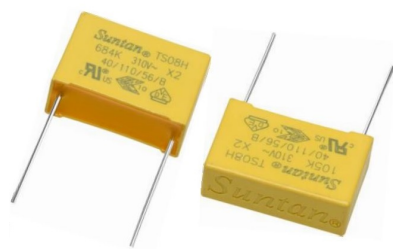

Standard Lead Length: 20mm min.  
Dimension Table for 20V AC (Unit: mm)

| Cap     | W  | H | L  | P  | W  | H | L  | P  | W  | H | L  | P  | W  | H | L  | P  |
|---------|----|---|----|----|----|---|----|----|----|---|----|----|----|---|----|----|
| 0.001   | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 |
| 0.002   | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 |
| 0.005   | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 |
| 0.01    | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 |
| 0.02    | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 |
| 0.05    | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 |
| 0.1     | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 |
| 0.2     | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 |
| 0.5     | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 |
| 1       | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 |
| 2       | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 |
| 5       | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 |
| 10      | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 |
| 20      | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 |
| 50      | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 |
| 100     | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 |
| 200     | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 |
| 500     | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 |
| 1000    | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 |
| 2000    | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 |
| 5000    | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 |
| 10000   | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 |
| 20000   | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 |
| 50000   | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 |
| 100000  | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 |
| 200000  | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 |
| 500000  | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 |
| 1000000 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 | 10 | 5 | 11 | 15 |

## Caratteristiche Tecniche:

|                     |         |
|---------------------|---------|
| Capacità (F):       | 10KpF   |
| Passo:              | 15 mm   |
| Tensione (VAC-VDC): | 310VAC  |
| Gamma:              | Radiale |
| Tipologia:          | X2      |