


Condensatori in poliestere, polipropilene ed X2

## X2 SERIE TS08H 310VAC 22KPF PASSO 10MM

X2 TS08H/FC K 22K 310V p10 13x4x9

Codice Adimpex: **CNB00420H**

P/N: **TS08H0A9223KRB0DSR**

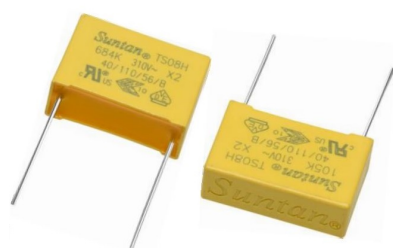

Standard Lead Length: 20mm min.  
Dimension Table for 200V AC (Unit: mm)

| K10  |    |    |   |    |    | K15  |    |    |   |    |    |
|------|----|----|---|----|----|------|----|----|---|----|----|
| CAP  | W  | H  | T | P  | Q  | CAP  | W  | H  | T | P  | Q  |
| 4000 | 10 | 11 | 4 | 10 | 10 | 4000 | 10 | 11 | 4 | 10 | 10 |
| 4001 | 10 | 11 | 4 | 10 | 10 | 4001 | 10 | 11 | 4 | 10 | 10 |
| 4002 | 10 | 11 | 4 | 10 | 10 | 4002 | 10 | 11 | 4 | 10 | 10 |
| 4003 | 10 | 11 | 4 | 10 | 10 | 4003 | 10 | 11 | 4 | 10 | 10 |
| 4004 | 10 | 11 | 4 | 10 | 10 | 4004 | 10 | 11 | 4 | 10 | 10 |
| 4005 | 10 | 11 | 4 | 10 | 10 | 4005 | 10 | 11 | 4 | 10 | 10 |
| 4006 | 10 | 11 | 4 | 10 | 10 | 4006 | 10 | 11 | 4 | 10 | 10 |
| 4007 | 10 | 11 | 4 | 10 | 10 | 4007 | 10 | 11 | 4 | 10 | 10 |
| 4008 | 10 | 11 | 4 | 10 | 10 | 4008 | 10 | 11 | 4 | 10 | 10 |
| 4009 | 10 | 11 | 4 | 10 | 10 | 4009 | 10 | 11 | 4 | 10 | 10 |
| 4010 | 10 | 11 | 4 | 10 | 10 | 4010 | 10 | 11 | 4 | 10 | 10 |
| 4011 | 10 | 11 | 4 | 10 | 10 | 4011 | 10 | 11 | 4 | 10 | 10 |
| 4012 | 10 | 11 | 4 | 10 | 10 | 4012 | 10 | 11 | 4 | 10 | 10 |
| 4013 | 10 | 11 | 4 | 10 | 10 | 4013 | 10 | 11 | 4 | 10 | 10 |
| 4014 | 10 | 11 | 4 | 10 | 10 | 4014 | 10 | 11 | 4 | 10 | 10 |
| 4015 | 10 | 11 | 4 | 10 | 10 | 4015 | 10 | 11 | 4 | 10 | 10 |
| 4016 | 10 | 11 | 4 | 10 | 10 | 4016 | 10 | 11 | 4 | 10 | 10 |
| 4017 | 10 | 11 | 4 | 10 | 10 | 4017 | 10 | 11 | 4 | 10 | 10 |
| 4018 | 10 | 11 | 4 | 10 | 10 | 4018 | 10 | 11 | 4 | 10 | 10 |
| 4019 | 10 | 11 | 4 | 10 | 10 | 4019 | 10 | 11 | 4 | 10 | 10 |
| 4020 | 10 | 11 | 4 | 10 | 10 | 4020 | 10 | 11 | 4 | 10 | 10 |
| 4021 | 10 | 11 | 4 | 10 | 10 | 4021 | 10 | 11 | 4 | 10 | 10 |
| 4022 | 10 | 11 | 4 | 10 | 10 | 4022 | 10 | 11 | 4 | 10 | 10 |
| 4023 | 10 | 11 | 4 | 10 | 10 | 4023 | 10 | 11 | 4 | 10 | 10 |
| 4024 | 10 | 11 | 4 | 10 | 10 | 4024 | 10 | 11 | 4 | 10 | 10 |
| 4025 | 10 | 11 | 4 | 10 | 10 | 4025 | 10 | 11 | 4 | 10 | 10 |
| 4026 | 10 | 11 | 4 | 10 | 10 | 4026 | 10 | 11 | 4 | 10 | 10 |
| 4027 | 10 | 11 | 4 | 10 | 10 | 4027 | 10 | 11 | 4 | 10 | 10 |
| 4028 | 10 | 11 | 4 | 10 | 10 | 4028 | 10 | 11 | 4 | 10 | 10 |
| 4029 | 10 | 11 | 4 | 10 | 10 | 4029 | 10 | 11 | 4 | 10 | 10 |
| 4030 | 10 | 11 | 4 | 10 | 10 | 4030 | 10 | 11 | 4 | 10 | 10 |
| 4031 | 10 | 11 | 4 | 10 | 10 | 4031 | 10 | 11 | 4 | 10 | 10 |
| 4032 | 10 | 11 | 4 | 10 | 10 | 4032 | 10 | 11 | 4 | 10 | 10 |
| 4033 | 10 | 11 | 4 | 10 | 10 | 4033 | 10 | 11 | 4 | 10 | 10 |
| 4034 | 10 | 11 | 4 | 10 | 10 | 4034 | 10 | 11 | 4 | 10 | 10 |
| 4035 | 10 | 11 | 4 | 10 | 10 | 4035 | 10 | 11 | 4 | 10 | 10 |
| 4036 | 10 | 11 | 4 | 10 | 10 | 4036 | 10 | 11 | 4 | 10 | 10 |
| 4037 | 10 | 11 | 4 | 10 | 10 | 4037 | 10 | 11 | 4 | 10 | 10 |
| 4038 | 10 | 11 | 4 | 10 | 10 | 4038 | 10 | 11 | 4 | 10 | 10 |
| 4039 | 10 | 11 | 4 | 10 | 10 | 4039 | 10 | 11 | 4 | 10 | 10 |
| 4040 | 10 | 11 | 4 | 10 | 10 | 4040 | 10 | 11 | 4 | 10 | 10 |

### Caratteristiche Tecniche:

|                     |         |
|---------------------|---------|
| Passo:              | 10 mm   |
| Capacità (F):       | 22KpF   |
| Tensione (VAC-VDC): | 310VAC  |
| Gamma:              | Radiale |
| Tipologia:          | X2      |