


Condensatori in poliestere, polipropilene ed X2

X2 SERIE TS08H 310VAC 100KPF PASSO 15MM

X2 TS08H/FC K 100K 310V p15 18x5x11

Codice Adimpex: **CNB00750H**

P/N: **TS08H0A9104KCB0ESR**

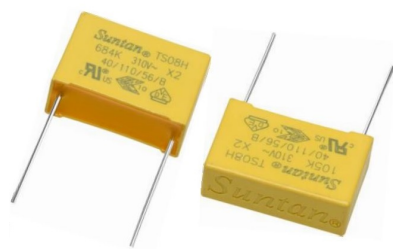

Standard Lead Length: 20mm min.
Dimension Table for 200V AC (Unit: mm)

Cap	W	H	L	P	W	H	L	P	W	H	L	P	W	H	L	P
4000	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4001	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4002	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4003	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4004	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4005	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4006	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4007	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4008	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4009	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4010	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4011	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4012	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4013	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4014	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4015	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4016	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4017	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4018	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4019	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4020	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4021	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4022	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4023	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4024	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4025	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4026	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4027	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4028	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4029	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4030	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4031	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4032	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4033	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4034	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4035	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4036	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4037	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4038	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4039	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15
4040	10	5	11	15	10	5	11	15	10	5	11	15	10	5	11	15

Caratteristiche Tecniche:

Capacità (F):	100KpF
Passo:	15 mm
Tensione (VAC-VDC):	310VAC
Gamma:	Radiale
Tipologia:	X2