


Condensatori in poliestere, polipropilene ed X2

X2 SERIE TS08H 310VAC 330KPF PASSO 22.5MM

X2 TS08H/FC K 330K 310V p22,5 26,5x7x16,5

Codice Adimpex: **CNB00990H**

P/N: **TS08H0A9334KAB0GSR**

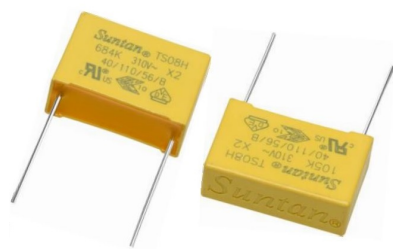

Standard Lead Length: 20mm min.
Dimension Table for 20V AC (Unit: mm)

Cap	W	H	L	P	W	H	L	P	W	H	L	P	W	H	L	P
4000	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4001	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4002	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4003	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4004	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4005	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4006	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4007	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4008	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4009	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4010	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4011	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4012	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4013	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4014	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4015	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4016	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4017	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4018	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4019	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4020	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4021	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4022	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4023	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4024	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4025	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4026	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4027	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4028	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4029	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4030	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4031	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4032	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4033	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4034	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4035	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4036	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4037	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4038	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4039	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5
4040	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5	10	11	16	2.5

Caratteristiche Tecniche:

Passo:	22.5 mm
Tensione (VAC-VDC):	310VAC
Capacità (F):	330KpF
Gamma:	Radiale
Tipologia:	X2