

## CONDENSATORI X2



**Passo 22.5 mm 310V AC**

Codice Adimpex: **CNB01230-R**

X2 TS08S/FC K 1uf 310V p22,5 26,5x11x20

Serie: TS08S

p/n: TS08S-310V

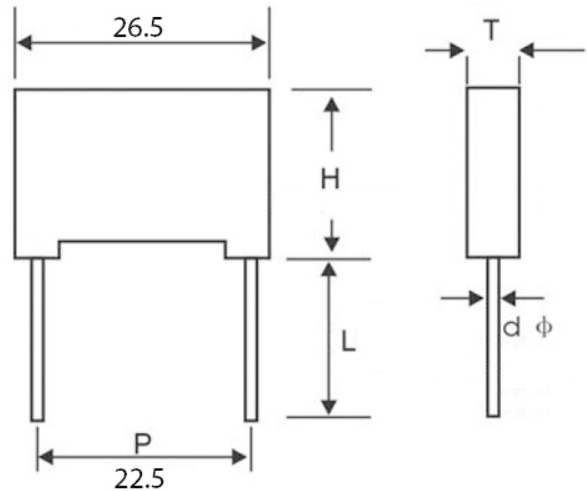

Codice Adimpex		$\mu\text{F}$	H	T	d
L=6	L=20				
CNB00830	CNB00835	0.15	16.5	7.0	0.8
CNB00870	CNB00875	0.18	16.5	7.0	0.8
CNB00910	CNB00915	0.22	16.5	7.0	0.8
CNB00950	CNB00955	0.27	16.5	7.0	0.8
CNB00990	CNB00995	0.33	16.5	7.0	0.8
CNB01070	CNB01075	0.47	19.0	10.0	0.8

Codice Adimpex		$\mu\text{F}$	H	T	d
L=6	L=20				
CNB01110	CNB01115	0.56	19.0	10.0	0.8
CNB01150	CNB01155	0.68	19.0	10.0	0.8
CNB01190	CNB01195	0.82	19.0	10.0	0.8
<b>CNB01230</b>	<b>CNB01235</b>	1.00	20.0	11.0	0.8
CNB01270	CNB01275	1.50	22.0	13.0	0.8

## CARATTERISTICHE

- Dielettrico: film polipropilene
- Avvolgimento: tipo non induttivo
- Rivestimento: termoplastico, sigillato con resina epossidica; box resistente a solventi ed alla fiamma secondo UL94V-0
- Tensione nominale: **275V AC; 310V AC**
- Tolleranza:  $\pm 10\%$  (K) standard
- Temperatura di lavoro:  $-40^{\circ}\text{C} \div 110^{\circ}\text{C}$

## FEATURES

- Dielectric: polypropylene film
- Winding: non-inductive type
- Protection: plastic case, thermosetting resin filled; box material is solvent resistant and flame retardant according to UL94V-0
- Nominal voltage: **275V AC; 310V AC**
- Tolerance:  $\pm 10\%$  (K) standard
- Operating temperature:  $-40^{\circ}\text{C} \div 110^{\circ}\text{C}$

