


Condensatori in poliestere, polipropilene ed X2

X2 SERIE TS08H 310VAC 1uF PASSO 27.5MM

X2 TS08H/FC K 1uF 310V p27,5 31,5x10,8x19.5

Codice Adimpex: **CNB01240H**

P/N: **TS08H0A9105KAB0ISR**

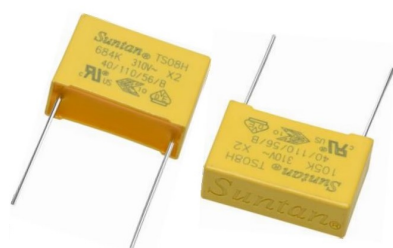

Standard Lead Length: 20mm min.
Dimension Table for 210V AC (Unit: mm)

Cap	W	H	L	P	W	H	L	P	W	H	L	P	W	H	L	P
4000	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4001	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4002	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4003	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4004	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4005	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4006	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4007	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4008	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4009	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4010	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4011	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4012	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4013	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4014	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4015	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4016	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4017	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4018	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4019	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4020	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4021	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4022	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4023	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4024	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4025	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4026	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4027	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4028	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4029	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4030	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4031	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4032	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4033	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4034	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4035	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4036	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4037	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4038	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4039	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
4040	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10

Caratteristiche Tecniche:

Capacità (F):	1uF
Passo:	27.5 mm
Tensione (VAC-VDC):	310VAC
Gamma:	Radiale
Tipologia:	X2