


Condensatori in poliestere, polipropilene ed X2

X2 SERIE TS08H 310VAC 2.2UF PASSO 27.5MM

X2 TS08H/FC K 2,2uF 310V p27,5 31,5x14x25

Codice Adimpex: **CNB01320H**

P/N: **TS08H0A9225KBB010R**

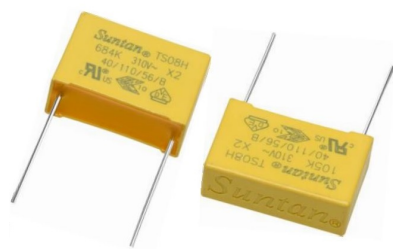

Standard Lead Length: 20mm min.
Dimension Table for 250V AC (Unit: mm)

Cap	W	H	L	P	W	H	L	P	W	H	L	P	W	H	L	P
0.001	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5
0.002	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5
0.005	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5
0.01	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5
0.02	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5
0.05	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5
0.1	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5
0.2	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5
0.5	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5
1	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5
2	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5
5	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5
10	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5
20	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5
50	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5
100	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5
200	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5
500	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5
1000	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5
2000	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5
5000	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5
10000	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5
20000	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5
50000	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5
100000	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5
200000	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5
500000	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5
1000000	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5	10	11	25	2.5

Caratteristiche Tecniche:

Capacità (F):	2,2uF
Passo:	27.5 mm
Tensione (VAC-VDC):	310VAC
Gamma:	Radiale
Tipologia:	X2