


**VARISTORI**
**Varistore ø5 mm**

 Codice Adimpex: **COT35020-R**

VARISTORI TSV-5D330K S 20VAC

Serie:TSV

p/n:TSV-5D330K 20VAC

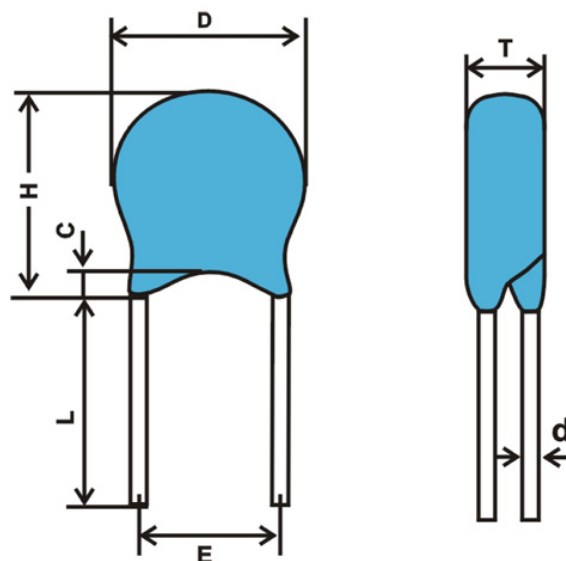

| Codice Adimpex  | V <sub>eff</sub><br>AC rms (V) | V <sub>v</sub><br>@1.0 mA (V) |
|-----------------|--------------------------------|-------------------------------|
| COT35011        | 11                             | 18                            |
| COT35014        | 14                             | 22                            |
| COT35017        | 17                             | 27                            |
| <b>COT35020</b> | 20                             | 33                            |
| COT35025        | 25                             | 39                            |
| COT35030        | 30                             | 47                            |
| COT35035        | 35                             | 56                            |
| COT35040        | 40                             | 68                            |
| COT35050        | 50                             | 82                            |
| COT35060        | 60                             | 100                           |
| COT35075        | 75                             | 120                           |
| COT35095        | 95                             | 150                           |
| COT35115        | 115                            | 180                           |
| COT35130        | 130                            | 200                           |

| Codice Adimpex | V <sub>eff</sub><br>AC rms (V) | V <sub>v</sub><br>@1.0 mA (V) |
|----------------|--------------------------------|-------------------------------|
| COT35140       | 140                            | 220                           |
| COT35150       | 150                            | 240                           |
| COT35175       | 175                            | 270                           |
| COT35190       | 190                            | 300                           |
| COT35210       | 210                            | 330                           |
| COT35230       | 230                            | 360                           |
| COT35250       | 250                            | 390                           |
| COT35275       | 275                            | 430                           |
| COT35300       | 300                            | 470                           |
| COT35320       | 320                            | 510                           |
| COT35350       | 350                            | 560                           |
| COT35385       | 385                            | 620                           |
| COT35420       | 420                            | 680                           |

**CARATTERISTICHE**

- Tolleranza: ± 10% (K)
- Temperatura di lavoro: -40°C ÷ +85°C
- Temperatura di immagazzinaggio: -40°C ÷ +125°C
- Confezione: sciolti (standard).

**FEATURES**

- Tolerance: ± 10% (K)
- Operating temperature: -40°C ÷ +85°C
- Storage temperature: -40°C ÷ +125°C
- Packing: bulk (standard).

| Tipo | T max.<br>(mm) | D max.<br>(mm) | H max.<br>(mm) | d ± 0.05<br>(mm) | E ± 0.8<br>(mm) | L min.<br>(mm) | c max.<br>(mm) |
|------|----------------|----------------|----------------|------------------|-----------------|----------------|----------------|
| 05D  | 4.0 - 5.5      | 7.5            | 10.5           | 0.5              | 5               | 20             | 2.5            |
| 07D  | 4.5 - 6.0      | 10             | 12.5           | 0.5              | 5               | 20             | 2.5            |
| 10D  | 4.5 - 6.5      | 13.5           | 16             | 0.7              | 7.5             | 20             | 2.5            |
| 14D  | 4.5 - 6.5      | 17.5           | 20             | 0.7              | 7.5             | 20             | 2.5            |
| 20D  | 5.0 - 7.5      | 24             | 26.5           | 1.0              | 10              | 20             | 2.5            |

