



## Condensatori al tantalio

### PTH A GOCCIA 10UF ±20% 16V IN BUSTA

COND EL.TANT. M 10uF 16V 2.54

Codice Adimpex: **DTG01016SU**

P/N: **TS19001C100MSB0A0R**

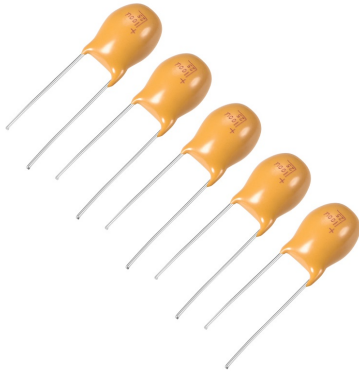

Capacitors and Rated Voltage Range

Rated Voltage (V)	1	4,2	16	36	50	25	35	50	63	80																																																																													
Capacitance (µF)	2,5	1	4,2	10	15	10	16	20	25	33																																																																													
<table border="1"> <thead> <tr> <th>Part</th> <th>W</th> <th>P</th> <th>1,5</th> <th>1,5</th> <th>1</th> <th>0,68</th> <th>0,33</th> <th>0,22</th> <th>0,15</th> <th>0,1</th> </tr> </thead> <tbody> <tr> <td>4W6F</td> <td>0,5</td> <td>2,54-5,08</td> <td>47</td> <td>22</td> <td>15</td> <td>10</td> <td>6,8</td> <td>4,7</td> <td>3,3</td> <td>2,2</td> </tr> <tr> <td>5W6F</td> <td>0,5</td> <td>2,54-5,08</td> <td>100</td> <td>50</td> <td>33</td> <td>22</td> <td>15</td> <td>10</td> <td>6,8</td> <td>4,7</td> </tr> <tr> <td>6W6F</td> <td>0,5</td> <td>2,54-5,08</td> <td>220</td> <td>100</td> <td>68</td> <td>47</td> <td>33</td> <td>22</td> <td>15</td> <td>10</td> </tr> <tr> <td>7W6F</td> <td>0,5</td> <td>2,54-5,08</td> <td>470</td> <td>200</td> <td>150</td> <td>100</td> <td>68</td> <td>47</td> <td>33</td> <td>22</td> </tr> <tr> <td>8W6F</td> <td>0,5</td> <td>2,54-5,08</td> <td>1000</td> <td>500</td> <td>330</td> <td>220</td> <td>150</td> <td>100</td> <td>68</td> <td>47</td> </tr> <tr> <td>9W6F</td> <td>0,5</td> <td>2,54-5,08</td> <td>2200</td> <td>1000</td> <td>680</td> <td>470</td> <td>330</td> <td>220</td> <td>150</td> <td>100</td> </tr> </tbody> </table>											Part	W	P	1,5	1,5	1	0,68	0,33	0,22	0,15	0,1	4W6F	0,5	2,54-5,08	47	22	15	10	6,8	4,7	3,3	2,2	5W6F	0,5	2,54-5,08	100	50	33	22	15	10	6,8	4,7	6W6F	0,5	2,54-5,08	220	100	68	47	33	22	15	10	7W6F	0,5	2,54-5,08	470	200	150	100	68	47	33	22	8W6F	0,5	2,54-5,08	1000	500	330	220	150	100	68	47	9W6F	0,5	2,54-5,08	2200	1000	680	470	330	220	150	100
Part	W	P	1,5	1,5	1	0,68	0,33	0,22	0,15	0,1																																																																													
4W6F	0,5	2,54-5,08	47	22	15	10	6,8	4,7	3,3	2,2																																																																													
5W6F	0,5	2,54-5,08	100	50	33	22	15	10	6,8	4,7																																																																													
6W6F	0,5	2,54-5,08	220	100	68	47	33	22	15	10																																																																													
7W6F	0,5	2,54-5,08	470	200	150	100	68	47	33	22																																																																													
8W6F	0,5	2,54-5,08	1000	500	330	220	150	100	68	47																																																																													
9W6F	0,5	2,54-5,08	2200	1000	680	470	330	220	150	100																																																																													

## Caratteristiche Tecniche:

Capacità (µF):	10
Tensione:	16 V
Dimensione (mm):	H=8.0 D=4.5
Montaggio:	PTH