

**CONNETTORI SCHEDA-FILO PASSO 1.25MM**




**1251 Maschio 90°**

Codice Adimpex: **J1251707-R**

CONN. MSRA p1.25 EX1251WR-07P

Serie:1251-WR

p/n:125107WR101

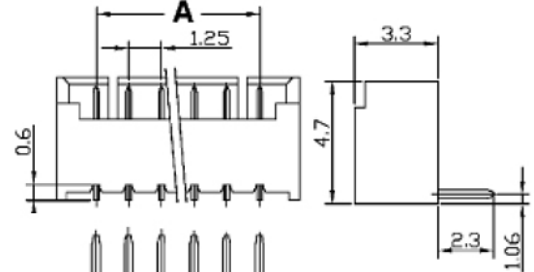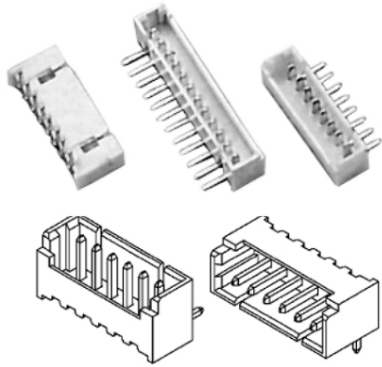

Dimensioni  
A = 1.25 x ( n - 1 )  
B = A + 3.0  
n = n° posizioni

Codice Adimpex	n. posizioni
J1251702	2
J1251703	3
J1251704	4
J1251705	5
J1251706	6
<b>J1251707</b>	7
J1251708	8

Codice Adimpex	n. posizioni
J1251709	9
J1251710	10
J1251711	11
J1251712	12
J1251713	13
J1251714	14
J12517xx	xx (02÷15)

**CARATTERISTICHE**

- Passo: 1.25mm
- Corrente: 1A AC/DC
- Tensione: 100V AC/DC
- Cavo: AWG 30÷26
- Corpo: PBT UL94V-0 colore naturale (HA); Nylon 6T UL94V-0 colore naturale (WV,WR,WD,WE)
- Terminali maschio: ottone stagnati
- Gamma di temperatura: -40°C ÷ 105°C

**FEATURES**

- Pitch: 1.25mm
- Current rating: 1A AC/DC
- Voltage rating: 100V AC/DC
- Applicable wires: AWG 30÷26
- Housing: PBT UL94V-0 natural color (HA); Nylon 6T UL94V-0 natural color (WV,WR,WD,WE)
- Male pins: brass, tin plated
- Operating temperature range: -40°C ÷ 105°C

