

CONNETTORI SCHEDE-FILO PASSO 1.25MM



1251 Maschio dritto SMD

Codice Adimpex: **J1251808-R**

CON.SMD MS p1.25 EX1251WD-08P *


Serie:1251-WD

p/n:125108WD101 SMD TUBE

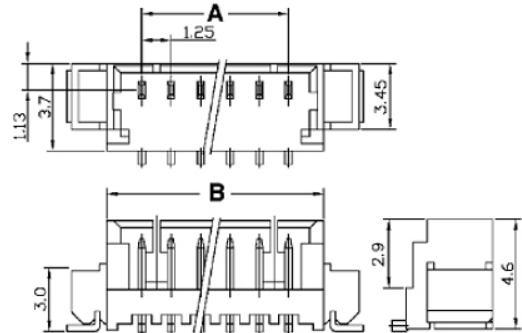

RECOMMENDED PCB LAYOUT

(PCB T=1.0~3.5mm)



Dimensioni

$A = 1.25 \times (n - 1)$

$B = A + 3.0$

$n = n^{\circ}$ posizioni

Codice Adimpex	n. posizioni	Codice Adimpex	n. posizioni
J1251802	2	J1251809	9
J1251803	3	J1251810	10
J1251804	4	J1251811	11
J1251805	5	J1251812	12
J1251806	6	J1251813	13
J1251807	7	J1251814	14
J1251808	8	J12518xx	xx (02÷15)

Confezionato in tubo

CARATTERISTICHE

- Passo: 1.25mm
- Corrente: 1A AC/DC
- Tensione: 100V AC/DC
- Cavo: AWG 30÷26
- Corpo: PBT UL94V-0 colore naturale (HA); Nylon 6T UL94V-0 colore naturale (WV,WR,WD,WE)
- Terminali maschio: ottone stagnati
- Gamma di temperatura: -40°C ÷ 105°C

FEATURES

- Pitch: 1.25mm
- Current rating: 1A AC/DC
- Voltage rating: 100V AC/DC
- Applicable wires: AWG 30÷26
- Housing: PBT UL94V-0 natural color (HA); Nylon 6T UL94V-0 natural color (WV,WR,WD,WE)
- Male pins: brass, tin plated
- Operating temperature range: -40°C ÷ 105°C

