

CONNETTORI SCHEDE-FILO PASSO 2.00MM



2001 Maschio 90° SMD

Codice Adimpex: **J2001613-R**

CO.MSRA SMD P.2.0 EX2001WE-13P

Serie:2001-WE

p/n:200113WE101

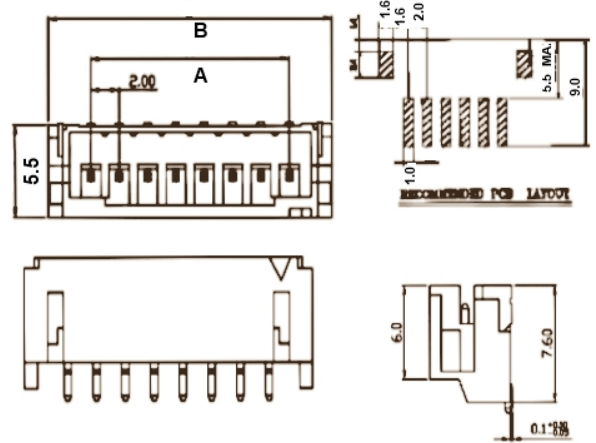

Dimensioni:

$$A = 2 \times (n - 1)$$

$$B = A + 5.95$$

n= numero contatti

| Codice Adimpex | n. posizioni | Codice Adimpex | n. posizioni |
|----------------|--------------|-----------------|--------------|
| J2001602 | 2 | J2001609 | 9 |
| J2001603 | 3 | J2001610 | 10 |
| J2001604 | 4 | J2001611 | 11 |
| J2001605 | 5 | J2001612 | 12 |
| J2001606 | 6 | J2001613 | 13 |
| J2001607 | 7 | J2001614 | 14 |
| J2001608 | 8 | J20016xx | xx (02÷16) |

Confezionato in tubo. Su richiesta disponibile anche nastrato.

CARATTERISTICHE

- Passo: 2.00mm
- Corrente: 3A AC/DC
- Tensione: 250V AC/DC
- Cavo: AWG 30÷22
- Corpo: Nylon 66 UL94V-0 colore naturale(HA,WV,WR);
Nylon 6T UL94V-0 colore naturale (WD,WE)
- Terminali maschio: ottone stagnati
- Gamma di temperatura: -25°C ÷ 105°C

FEATURES

- Pitch: 2.00mm
- Current rating: 3A AC/DC
- Voltage rating: 250V AC/DC
- Applicable wires: AWG 30÷22
- Housing: Nylon 66 UL94V-0 natural color (HA,WV,WR);
Nylon 6T UL94V-0 natural color (WD,WE)
- Male pins: brass, tin-plated
- Operating temperature range: -25°C ÷ 105°C

