

**CONNETTORI SCHEDA-FILO PASSO 2.50MM**



**2501 Maschio dritto**

Codice Adimpex: **J2501412-R**

CONN. MS p2.5 EX2501WV-12P

Serie:2501-WV

p/n:250112WV001

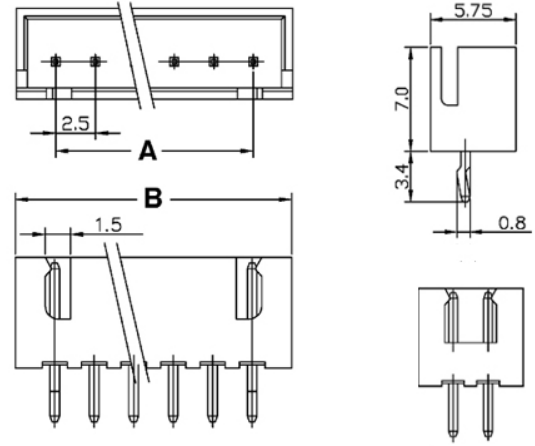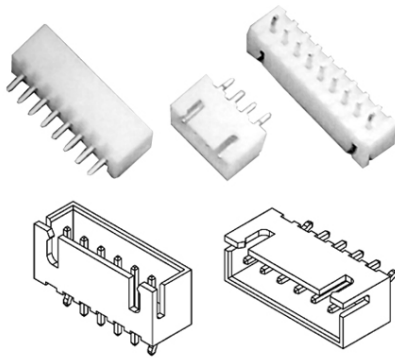

Dimensioni  
A = 2.5 x (n - 1)  
B = A + 5  
n = n° contatti

(2 Circuits)

| Codice Adimpex | n. posizioni |
|----------------|--------------|
| J2501402       | 2            |
| J2501403       | 3            |
| J2501404       | 4            |
| J2501405       | 5            |
| J2501406       | 6            |
| J2501407       | 7            |
| J2501408       | 8            |

| Codice Adimpex  | n. posizioni |
|-----------------|--------------|
| J2501409        | 9            |
| J2501410        | 10           |
| J2501411        | 11           |
| <b>J2501412</b> | 12           |
| J2501413        | 13           |
| J2501414        | 14           |
| J25014xx        | xx (02÷20)   |

**CARATTERISTICHE**

- Passo: 2.5mm
- Corrente: 3A AC/DC
- Tensione: 250V AC/DC
- Cavo: AWG 28÷22
- Corpo: Nylon 66 UL94V-0 colore naturale
- Terminali maschio: ottone stagnati
- Gamma di temperatura: -25°C ÷ 105°C

**FEATURES**

- Pitch: 2.5mm
- Current rating: 3A AC/DC
- Voltage rating: 250V AC/DC
- Applicable wires: AWG 28÷22
- Housing: Nylon 66 UL94V-0 natural color
- Male pins: brass, tin-plated
- Operating temperature range: -25°C ÷ 105°C

