

**CONNETTORI SCHEDA-FILO PASSO 2.50MM**



**2504 Femmina**

Codice Adimpex: **J2504105-R**

CONN. FM p2.5 EX2504H-05P

Serie:2504-HA

p/n:250405HA001

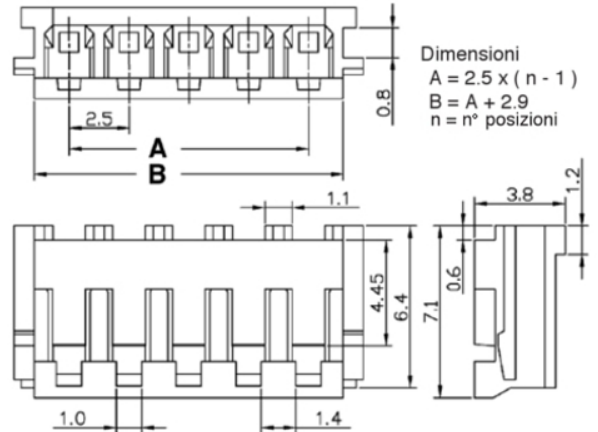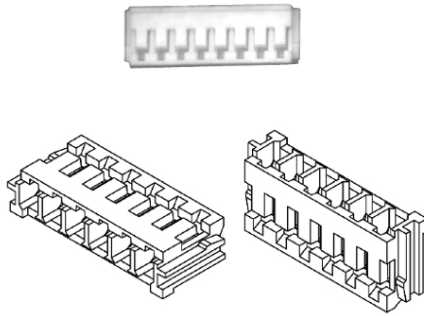

| Codice Adimpex  | n. posizioni |
|-----------------|--------------|
| J2504102        | 2            |
| J2504103        | 3            |
| J2504104        | 4            |
| <b>J2504105</b> | 5            |
| J2504106        | 6            |
| J2504107        | 7            |
| J2504108        | 8            |

| Codice Adimpex | n. posizioni |
|----------------|--------------|
| J2504109       | 9            |
| J2504110       | 10           |
| J2504111       | 11           |
| J2504112       | 12           |
| J2504113       | 13           |
| J2504114       | 14           |
| J25041xx       | xx (02÷15)   |

**CARATTERISTICHE**

- Passo: 2.50mm
- Corrente: 3A AC/DC
- Tensione: 250V AC/DC
- Cavo: AWG 28÷22
- Corpo: Nylon 66 UL94V-0 colore naturale
- Terminali maschio: ottone stagnati
- Gamma di temperatura: -25°C ÷ 105°C

**FEATURES**

- Pitch: 2.50mm
- Current rating: 3A AC/DC
- Voltage rating: 250V AC/DC
- Applicable wires: AWG 28÷22
- Housing: Nylon 66 UL94V-0 natural color
- Male pins: brass, tin-plated
- Operating temperature range: -25°C ÷ 105°C

