

CONNETTORI SCHEDA-FILO PASSO 2.50MM



2504 Femmina

Codice Adimpex: **J2504109-R**

CONN. FM p2.5 EX2504H-09P

Serie:2504-HA

p/n:250409HA001

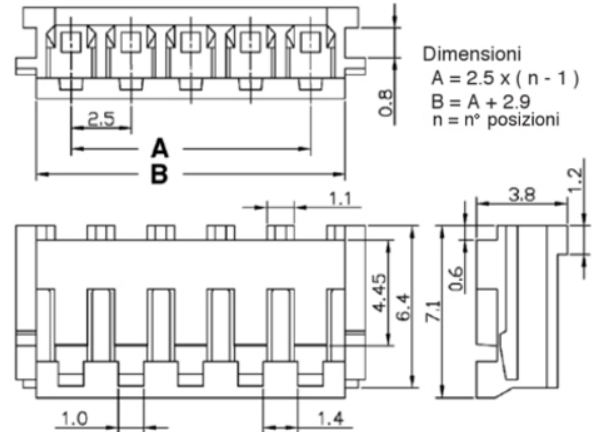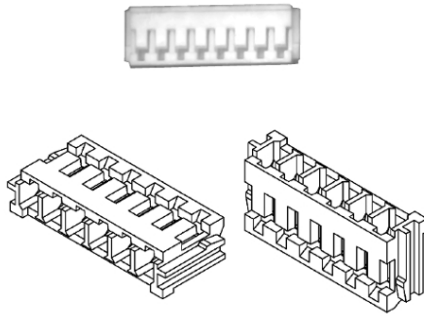

| Codice Adimpex | n. posizioni |
|----------------|--------------|
| J2504102 | 2 |
| J2504103 | 3 |
| J2504104 | 4 |
| J2504105 | 5 |
| J2504106 | 6 |
| J2504107 | 7 |
| J2504108 | 8 |

| Codice Adimpex | n. posizioni |
|-----------------|--------------|
| J2504109 | 9 |
| J2504110 | 10 |
| J2504111 | 11 |
| J2504112 | 12 |
| J2504113 | 13 |
| J2504114 | 14 |
| J25041xx | xx (02÷15) |

CARATTERISTICHE

- Passo: 2.50mm
- Corrente: 3A AC/DC
- Tensione: 250V AC/DC
- Cavo: AWG 28÷22
- Corpo: Nylon 66 UL94V-0 colore naturale
- Terminali maschio: ottone stagnati
- Gamma di temperatura: -25°C ÷ 105°C

FEATURES

- Pitch: 2.50mm
- Current rating: 3A AC/DC
- Voltage rating: 250V AC/DC
- Applicable wires: AWG 28÷22
- Housing: Nylon 66 UL94V-0 natural color
- Male pins: brass, tin-plated
- Operating temperature range: -25°C ÷ 105°C

