


**CONNETTORI SCHEDA-FILO E FILO-FILO
PASSO 3.00MM**

Pinze per crimpatura

Codice Adimpex: **J3001090-R**

PINZA 3001/02 AWG20/30

p/n:HT300100001 AWG20-30

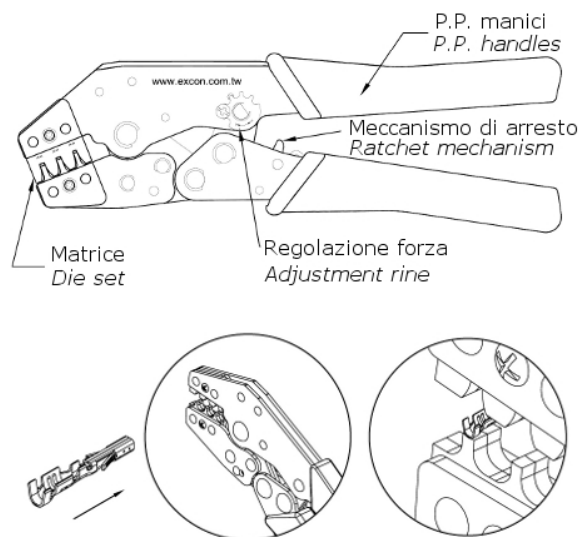

Codice Adimpex	serie contatti	AWG
J2001090	2001	22÷32
J2004090	2004 - 2005	22÷32
J2501090	2501	22÷32
J2503090	2503	28÷22
J2504090	2503	22÷32
J2541090	2541 - 2512	22÷30
J2542090	2542-2543-2544	22÷32
J2545090	2545	22÷30

Codice Adimpex	serie contatti	AWG
J2547090	2547 - 2548	22÷26
J3001090	3001 - 3002	20÷30
J3961090	3961-5084-5085	16÷26
J3962090	3962	18÷26
J4201090	4201	16÷26
J6605089	6605	12÷18
J6605090	6605	14÷24

CARATTERISTICHE

- Passo: 3.00mm
- Corrente: 5A AC/DC
- Tensione: 250V AC/DC
- Cavo: AWG 30÷20
- Corpo: Nylon 66 UL94V-0 colore nero (HM,HP,WV,WR);
Poliestere LCP UL94V-0 colore nero (WD,WE)
- Terminali maschio: ottone stagnati
- Gamma di temperatura: -25°C ÷ 105°

FEATURES

- Pitch: 3.00mm
- Current rating: 5A AC/DC
- Voltage rating: 250V AC/DC
- Applicable wires: AWG 30÷20
- Housing: Nylon 66 UL94V-0 black color (HM,HP,WV,WR);
Polyester LCP UL94V-0 black color (WD,WE)
- Male pins: brass, tin plated
- Operating temperature range: -25°C ÷ 105°C