

**CONNETTORI SCHEDA-FILO PASSO 2.54MM**



**7801 Maschio dritto**

Codice Adimpex: **J7801404-R**

CONN. MS p2.54 EX7801WV 04P

Serie:7801-WV

p/n:780104WV001

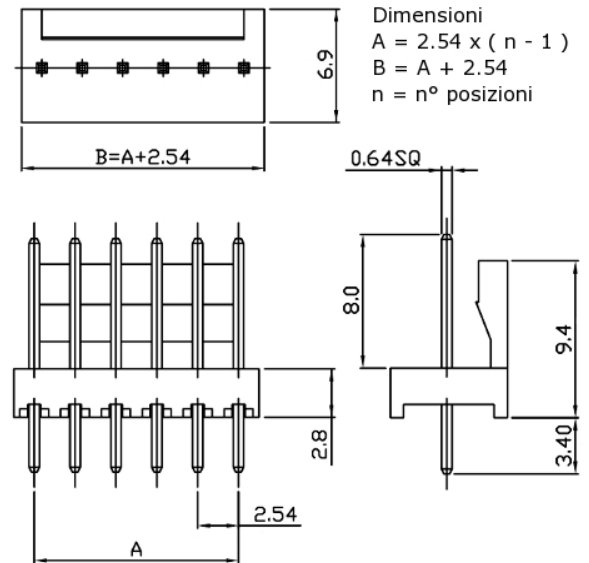

Codice Adimpex	n. posizioni
J7801402	2
J7801403	3
<b>J7801404</b>	4
J7801405	5
J7801406	6
J7801407	7
J7801408	8

Codice Adimpex	n. posizioni
J7801409	9
J7801410	10
J7801411	11
J7801412	12
J7801413	13
J7801414	14
J78014xx	xx (02÷28)


**CARATTERISTICHE**

**FEATURES**

**ACCESSORI: COVER**

- Passo: 2.54mm
- Corrente: 3A AC/DC
- Tensione: 250V AC/DC
- Cavo: 24AWG  
(su richiesta 22AWG; 26AWG; 28AWG)
- Corpo: Nylon 66 UL94V-2 colore naturale (HA,HB);  
Nylon 66 UL94V-0 colore naturale (WV,WR)
- Terminali maschio: ottone stagnati
- Gamma di temperatura: -25°C ÷ 105°C

- Pitch: 2.54mm
- Current rating: 3A AC/DC
- Voltage rating: 250V AC/DC
- Applicable wires: 24AWG  
(on demand 22AWG; 26AWG; 28AWG)
- Housing: Nylon 66 UL94V-2 natural color (HA,HB);  
Nylon 66 UL94V-0 natural color (WV,WR)
- Male pins: brass, tin plated
- Operating temperature range: -25°C ÷ 105°C



Codice **J78019xx**  
posizioni disponibili  
02÷28