

## INTERRUTTORI TATTILI



**6 x 6**

Codice Adimpex: **KTH02193KA**

T.S. TSA06231-280-11.35 BU66 H=11.35

Serie: TSA06231

p/n: TSA06231 H=11.35

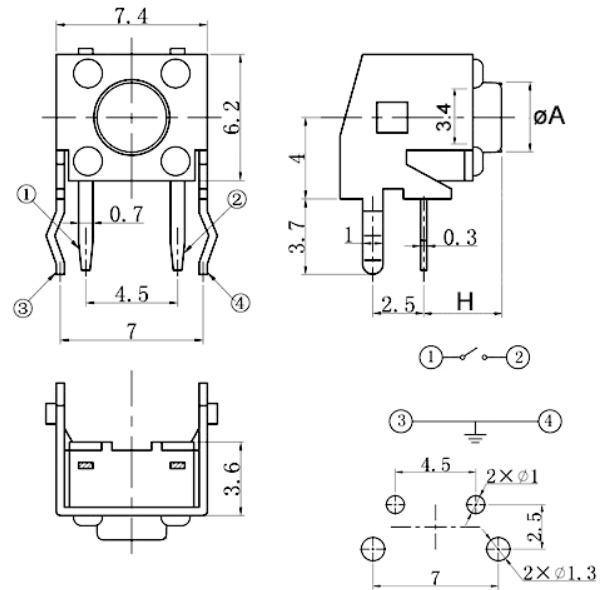

Codice Adimpex		H	A	corsa
forza di attuazione: 180 ± 50 gf	forza di attuazione: 280 ± 50 gf			
KTH01110	KTH02110	3.15	3.4	0.25
KTH01120	KTH02120	3.85	3.5	0.25
KTH01150	KTH02150	6.85	3.2	0.25
KTH01160	KTH02190	8.35	3.1	0.25
KTH01180	KTH02193	11.35	3.1	0.25
KTH01185	KTH02194	11.85	3.2	0.25
KTH01198	KTH02199	15.85	3.2	0.25

### CARATTERISTICHE

- Portata: 50mA 12V DC
- Resistenza di contatto: 0.03Ω max.
- Resistenza d'isolamento: 100MΩ min.
- Rigidità dielettrica: 250V AC per 1 minuto
- Gamma di temperatura: -25°C ÷ 70°C

### FEATURES

- Portata: 50mA 12V DC
- Contact resistance: 0.03Ω max.
- Insulation resistance: 100MΩ min.
- Dielectric withstanding: 250V AC or 1 minute
- Operating temperature: -25°C ÷ 70°C