

### INTERRUTTORI TATTILI



**4.5 x 4.5 SMD**

Codice Adimpex: **KTH34038KA**

Tsmd TSB45311-038-180-3.8 RP

Serie: TSB45311

p/n: TSB45311-038(180g)

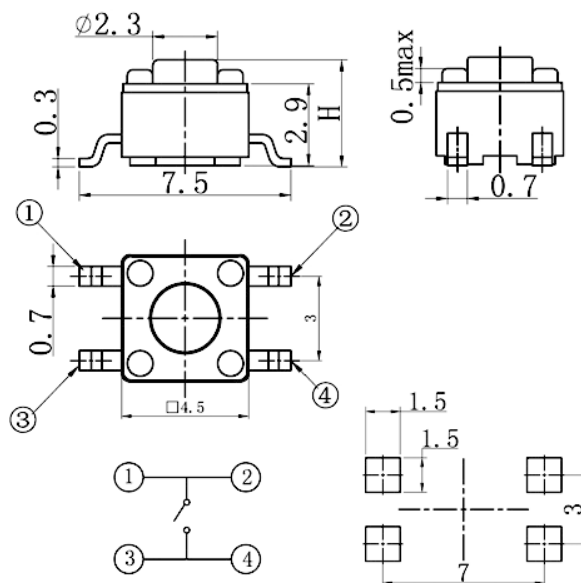

Codice Adimpex		H	corsa
forza di attuazione: $180 \pm 50$ gf	forza di attuazione: $280 \pm 50$ gf		
<b>KTH34038</b>	<b>KTH34238</b>	3.8	0.25
<b>KTH34043</b>	<b>KTH34243</b>	4.3	0.25
<b>KTH34050</b>	<b>KTH34250</b>	5.0	0.25
<b>KTH34055</b>	<b>KTH34255</b>	5.5	0.25
<b>KTH34070</b>	<b>KTH34270</b>	7.1	0.25

#### CARATTERISTICHE

- Portata: 50mA 12V DC
- Resistenza di contatto:  $0.03\Omega$  max.
- Resistenza d'isolamento:  $100M\Omega$  min.
- Rigidità dielettrica: 250V AC per 1 minuto
- Gamma di temperatura:  $-25^{\circ}\text{C} \div 70^{\circ}\text{C}$

#### FEATURES

- Portata: 50mA 12V DC
- Contact resistance:  $0.03\Omega$  max.
- Insulation resistance:  $100M\Omega$  min.
- Dielectric withstanding: 250V AC or 1 minute
- Operating temperature:  $-25^{\circ}\text{C} \div 70^{\circ}\text{C}$