


Tact switches

SMD CON MESSA A TERRA 6X6MM VERTICALE H3.1MM 180GR. TONDO

TSmd TSB06312-031-180-3.1 RP46

Codice Adimpex: **KTH60831KA**

P/N: **TSB06312-031 H=3.1**

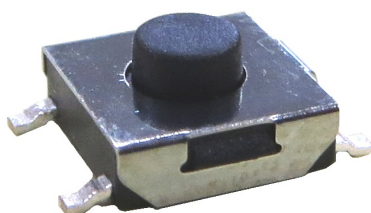

SPECIFICATIONS

Function: Momentary action
Contact Arrangement: SPST, Normally Open
Termination: SMD version

Mechanical

Actuation Force: 180 ± 50 mN

Life Expectancy: 100,000 Operations

Electrical

Contact Rating: 50mA @ 12V DC

Switching Strength: 250 mN for 100,000

Contact Resistance: 50mΩ Max.

Insulation Resistance: 100MΩ Min.

Travel: 0.25 ± 0.1 mm

Environmental

Operating Temperature: -25 ~ +70 °C

Relative Humidity: 40% to 90%

Materials


5: Dam: Black GF PPS

4: Case: Resin with Phos. copper cladding

3: Contact: Stainless Steel

2: Wiper: Black GF PPS

1: Terminal: Copper (4021 ± 0.2) with Silver Cladding



Caratteristiche Tecniche:

Forza attuazione:	180 Gr.
Altezza:	3.1 mm
Dimensione (mm):	6x6
Attuatore quadrato:	No
Già munito di cappuccio:	No
Dustproof:	No
Montaggio:	SMD
Gamma:	Tact Switches
Orientamento:	Verticale