

INTERRUTTORI TATTILI




12 x 12 SMD

Codice Adimpex: **KTH66277KA**

TSmd TSB12319-077-280/-7.7 RP46

Serie: TSB12311

p/n: TSB12319-077(280g)

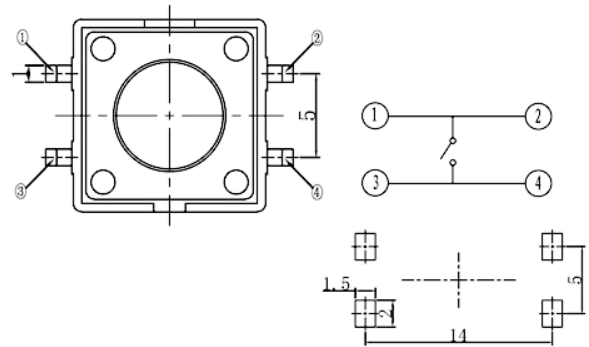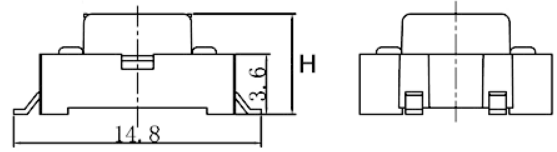

| Codice Adimpex | | H | corsa |
|---|---|-----|-------|
| forza di attuazione: 180 ± 50 gf | forza di attuazione: 280 ± 50 gf | | |
| KTH66043 | KTH66243 | 4.3 | 0.25 |
| KTH66050 | KTH66250 | 5.0 | 0.25 |
| KTH66075 | KTH66275 | 7.5 | 0.25 |
| KTH66077 | KTH66277 | 7.7 | 0.25 |
| KTH66085 | KTH66285 | 8.5 | 0.25 |
| KTH66095 | KTH66295 | 9.5 | 0.25 |
| KTH66112 | KTH66312 | 12 | 0.25 |

Altre altezze fornibili: 4.5, 5.5, 6.0, 6.5, 7.0, 8.0, 9.0, 10, 10.5, 11.0, 11.5, 12.5, 13.0, 15.0, 15.5, 17.0, 18.0, 21.0

CARATTERISTICHE

- Portata: 50mA 12V DC
- Resistenza di contatto: 0.03Ω max.
- Resistenza d'isolamento: 100MΩ min.
- Rigidità dielettrica: 250V AC per 1 minuto
- Gamma di temperatura: -25°C ÷ 70°C

FEATURES

- Portata: 50mA 12V DC
- Contact resistance: 0.03Ω max.
- Insulation resistance: 100MΩ min.
- Dielectric withstanding: 250V AC or 1 minute
- Operating temperature: -25°C ÷ 70°C