

DIP SWITCH PTH



Serie RS

Codice Adimpex: **KV000101-R**

INTER DIP SWITCH RS-01

Serie:RS

p/n:RS-01 (tube 130 pcs)

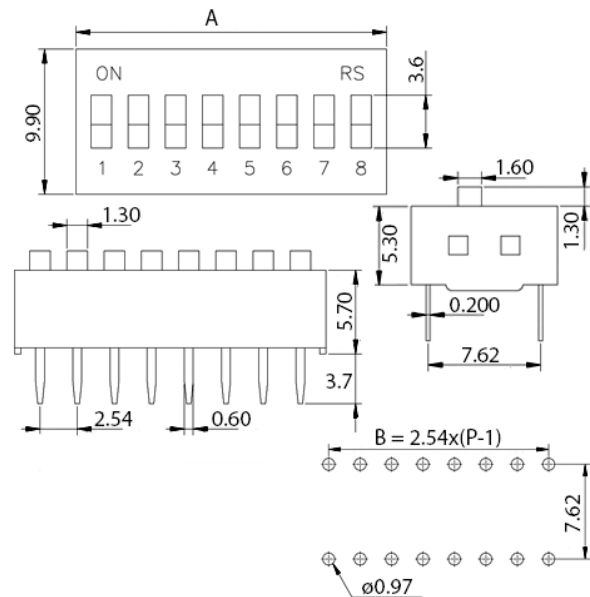

Codice Adimpex	n° posizioni	A (mm)	package
KV000101	01	3.84	tube 130 pcs
KV000102	02	6.08	tube 82 pcs
KV000103	03	8.92	tube 56 pcs
KV000104	04	11.16	tube 45 pcs
KV000105	05	13.70	tube 36 pcs
KV000106	06	16.24	tube 30 pcs
KV000107	07	19.08	tube 26 pcs
KV000108	08	21.32	tube 23 pcs
KV000109	09	24.16	tube 20 pcs
KV000110	10	26.40	tube 19 pcs
KV000112	12	31.48	tube 16 pcs

CARATTERISTICHE

- Portata: 25mA, 24V DC
- Resistenza di contatto: 100mΩ max.
- Resistenza d'isolamento: > 1000MΩ a 100V DC
- Rigidità dielettrica: 500V DC per 1 minuto
- Forza: 800gr. max.
- Corsa: 0.9 mm
- Vita operativa (cicli): 2000
- Attuatore: PBT UL 94V-0 bianco
- Chiusura: PBT UL 94V-0 nero
- Base: PBT UL 94V-0 nero
- Contatti: lega di rame, dorato
- Terminali: ottone, stagnato

FEATURES

- Rating: 25mA, 24V DC.
- Contact resistance: 100mΩ max.
- Insulation resistance: > 1000MΩ at 100V DC
- Dielectric withstanding: 500V DC for 1 minute
- Operating force: 800 gr. max.
- Stroke: 0.9 mm
- Operating life (cycles): 2000
- Actuator: PBT UL 94V-0 white
- Cover: PBT UL 94V-0 black
- Base: PBT UL 94V-0 black
- Contact: copper alloy, gold plating
- Terminal: brass, tin plating