



**DIP SWITCH PTH**
**Serie DA**

 Codice Adimpex: **KVT01044-R**

INTER DIP SWITCH DA-04V RA\*

Serie:DA

p/n:DA-04-V

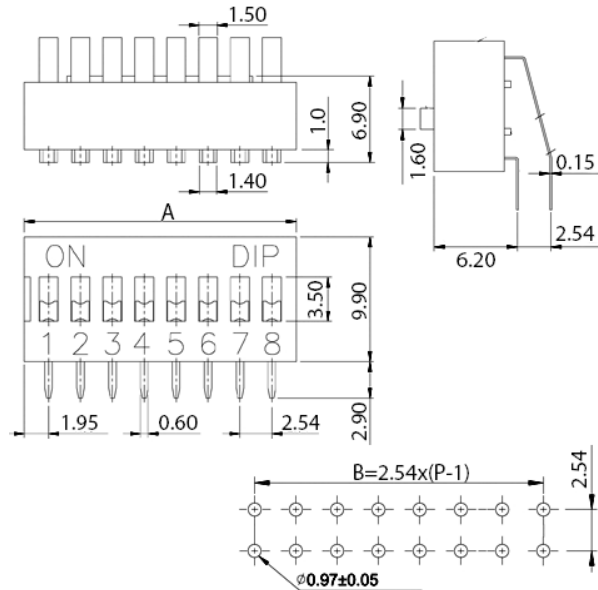

Codice Adimpex	n° posizioni	A (mm)	package	colore
KVT01042	02	6.44	tube 73 pcs	rosso
KVT01043	03	8.98	tube 52 pcs	rosso
<b>KVT01044</b>	04	11.52	tube 40 pcs	rosso
<b>KVT01044DI</b>	04	11.52	tube 40 pcs	blu
KVT01045	05	14.06	tube 33 pcs	rosso
KVT01046	06	16.60	tube 28 pcs	rosso
KVT01046DI	06	16.60	tube 28 pcs	blu
KVT01047	07	19.14	tube 24 pcs	rosso
KVT01048	08	21.68	tube 21 pcs	rosso
KVT01049	09	24.22	tube 19 pcs	rosso
KVT01050	10	26.76	tube 17 pcs	rosso
KVT01052	12	31.84	tube 14 pcs	rosso

**CARATTERISTICHE**

- Portata: 25mA, 24V DC
- Resistenza di contatto: 100mΩ max.
- Resistenza d'isolamento: > 1000MΩ a 100V DC
- Rigidità dielettrica: 500V DC per 1 minuto
- Forza: 800gr. max.
- Corsa: 0.9 mm
- Vita operativa (cicli): 2000
- Attuatore: PBT UL 94V-0 bianco
- Chiusura: PBT UL 94V-0 nero
- Base: PBT UL 94V-0 nero
- Contatti: lega di rame, dorato
- Terminali: ottone, stagnato

**FEATURES**

- Rating: 25mA, 24V DC.
- Contact resistance: 100mΩ max.
- Insulation resistance: > 1000MΩ at 100V DC
- Dielectric withstanding: 500V DC for 1 minute
- Operating force: 800 gr. max.
- Stroke: 0.9 mm
- Operating life (cycles): 2000
- Actuator: PBT UL 94V-0 white
- Cover: PBT UL 94V-0 black
- Base: PBT UL 94V-0 black
- Contact: copper alloy, gold plating
- Terminal: brass, tin plating

