

INTERRUTTORI MINIATURA A LEVA

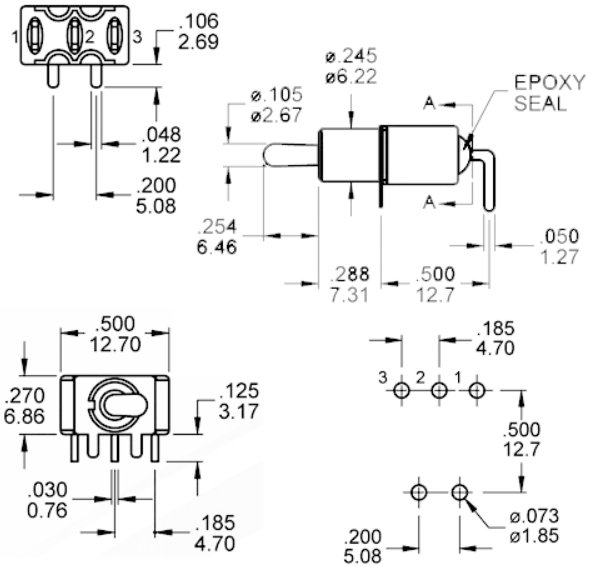

Singolo 90° orizzontale da c.s.




Codice Adimpex: **KWS00314-R**

WT1032-HT2B4SE S-RA/PCO O-(O)

Serie: WT103-H

p/n: WT1032-HT2B4SE



Codice Adimpex	circuito	funzione		
				
KWS00313	SPDT	on	none	on
KWS00314	SPDT	on	none	(on)
KWS00315	SPDT	on	off	on
KWS00316	SPDT	(on)	off	(on)
KWS00317	SPDT	on	on	on

CARATTERISTICHE

FEATURES

- Corrente nominale: 5A 120V AC o 28V DC; 2A 250V AC
- Resistenza di contatto: < 10mΩ @ 2-4V DC 100mA
- Resistenza d'isolamento: 1000MΩ min.
- Rigidità dielettrica: 1000V RMS
- Vita elettrica: 40000 cicli a pieno carico
- Attuatore: ottone cromato
- Bussola: ottone nichelato
- Corpo: acciaio inossidabile
- Supporto switch: ottone stagnato
- Terminali e contatti: lega di rame argentati
- Gamma di temperatura: -30°C ÷ 85°C

- Current rating: 5A 120V AC or 28V DC; 2A 250V AC
- Contact resistance: < 10mΩ @ 2-4V DC 100mA
- Insulation resistance: 1000MΩ min.
- Dielectric withstanding: 1000V RMS
- Operating life: 40000 cycles at full load
- Actuator: brass, chrome plated
- Bushing: brass, nickel plated
- Housing: stainless steel
- Switch support: brass, tin plated
- Terminals and contacts: copper alloy, silver plating
- Operating temperature: -30°C ÷ 85°C