

MINI MATCH PASSO 2.54MM



Mini match femmina SMD

Codice Adimpex: **LH130010-R**

CONN M.MATCH SMD MIMM-10TR-U *

Serie: MIMM

p/n: MIMM-10TR-U

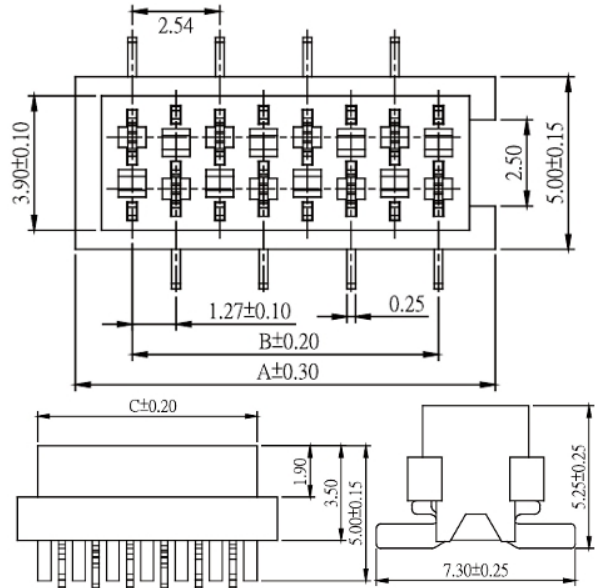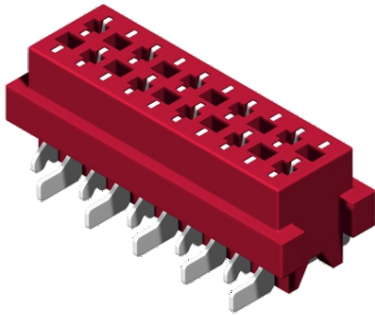

Codice Adimpex	n. posizioni	A	B	C
LH130004	04	7.00	3.81	5.60
LH130006	06	9.54	6.35	8.14
LH130008	08	12.08	8.89	10.68
LH130010	10	14.62	11.43	13.22
LH130012	12	17.16	13.97	15.76
LH130014	14	19.70	16.51	18.30
LH130016	16	22.24	19.05	20.84
LH130018	18	24.78	21.59	23.38
LH130020	20	27.32	24.13	25.92

CARATTERISTICHE

- Corrente: 1.0A
- Resistenza d'isolamento: 1000MΩ Min
- Resistenza di contatto: 20mΩ Max
- Resistenza dielettrica: 500V AC for 1 minute
- Temperatura operativa: -40°C ÷ 105°C (-25°C ÷ 58°C per MIDPI3)
- Case: Poliestere, UL94V
- Standard: P.B.T.
- Terminali: lega di rame

FEATURES

- Current rate: 1.0A
- Insulation resistance: 1000MΩ Min
- Contact resistance: 20mΩ Max
- Dielectric voltage: 500V AC for 1 minute
- Operation temperature: -40°C ÷ 105°C (-25°C ÷ 58°C for MIDPI3)
- Insulator: polyester, UL94V
- Standard: P.B.T.
- Terminal: copper alloy