

MINI MATCH PASSO 2.54MM



Mini match femmina dritta con lock

Codice Adimpex: **LH150606-R**

CONN M.MATCH PTH MIMAS-06TR-U

Serie: MIMAS

p/n: MIMAS-06TR-U

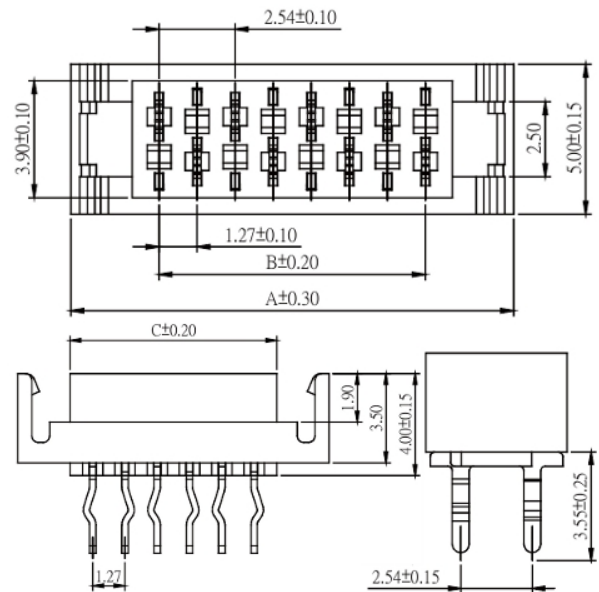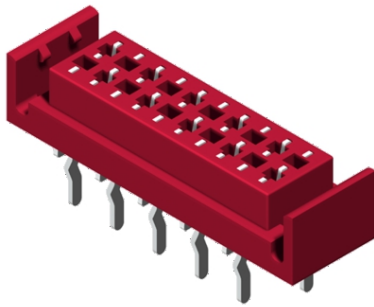

Codice Adimpex	n. posizioni	A	B	C
LH150604	04	9.70	3.81	5.60
LH150606	06	12.24	6.35	8.14
LH150608	08	14.78	8.89	10.68
LH150610	10	17.32	11.43	13.22
LH150612	12	19.86	13.97	15.76
LH150614	14	22.40	16.51	18.30
LH150616	16	24.94	19.05	20.84
LH150618	18	27.48	21.59	23.38
LH150620	20	30.02	24.13	25.92

CARATTERISTICHE

- Corrente: 1.0A
- Resistenza d'isolamento: 1000MΩ Min
- Resistenza di contatto: 20mΩ Max
- Resistenza dielettrica: 500V AC for 1 minute
- Temperatura operativa: $-40^{\circ}\text{C} \div 105^{\circ}\text{C}$
($-25^{\circ}\text{C} \div 58^{\circ}\text{C}$ per MIDPI3)
- Case: Poliestere, UL94V
- Standard: P.B.T.
- Terminali: lega di rame

FEATURES

- Current rate: 1.0A
- Insulation resistance: 1000MΩ Min
- Contact resistance: 20mΩ Max
- Dielectric voltage: 500V AC for 1 minute
- Operation temperature: $-40^{\circ}\text{C} \div 105^{\circ}\text{C}$
($-25^{\circ}\text{C} \div 58^{\circ}\text{C}$ for MIDPI3)
- Insulator: polyester, UL94V
- Standard: P.B.T.
- Terminal: copper alloy