

MINI MATCH PASSO 2.54MM



Mini match maschio dritto

Codice Adimpex: **LH180010-R**

CONNET MINI MATCH MIMS-M10TR-L

Serie: MIMS-M

p/n: MIMS-M10TR-L

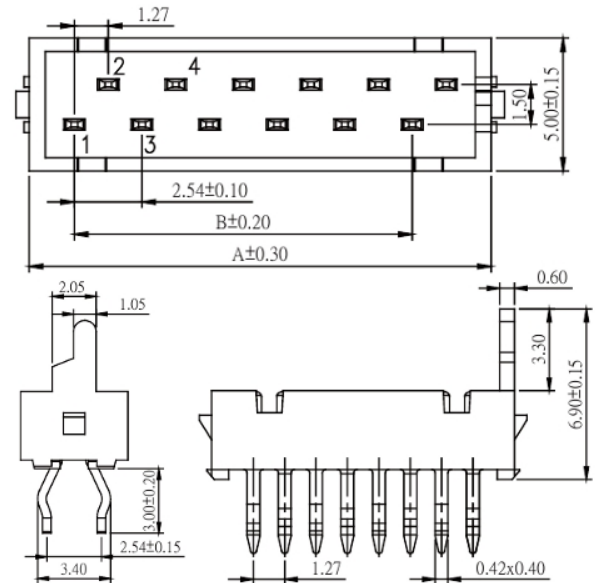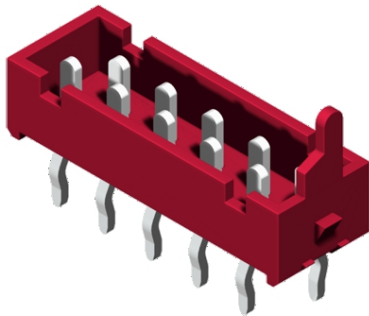

Codice Adimpex	n. posizioni	A	B
LH180004	04	7.20	2.54
LH180006	06	9.74	5.08
LH180008	08	12.28	7.62
LH180010	10	14.82	10.16
LH180012	12	17.36	12.70
LH180014	14	19.90	15.24
LH180016	16	22.44	17.78
LH180018	18	24.98	20.32
LH180020	20	27.52	22.86

CARATTERISTICHE

- Corrente: 1.0A
- Resistenza d'isolamento: 1000M Ω Min
- Resistenza di contatto: 20m Ω Max
- Resistenza dielettrica: 500V AC for 1 minute
- Temperatura operativa: -40°C ÷ 105°C (-25°C ÷ 58°C per MIDPI3)
- Case: Poliestere, UL94V
- Standard: P.B.T.
- Terminali: lega di rame

FEATURES

- Current rate: 1.0A
- Insulation resistance: 1000M Ω Min
- Contact resistance: 20m Ω Max
- Dielectric voltage: 500V AC for 1 minute
- Operation temperature: -40°C ÷ 105°C (-25°C ÷ 58°C for MIDPI3)
- Insulator: polyester, UL94V
- Standard: P.B.T.
- Terminal: copper alloy