

RISONATORI CERAMICI



Bassa frequenza

Codice Adimpex: **LR005600-L**

RISONATORE CERAMICO 560KHz **

Serie:CR

p/n:CR0560P

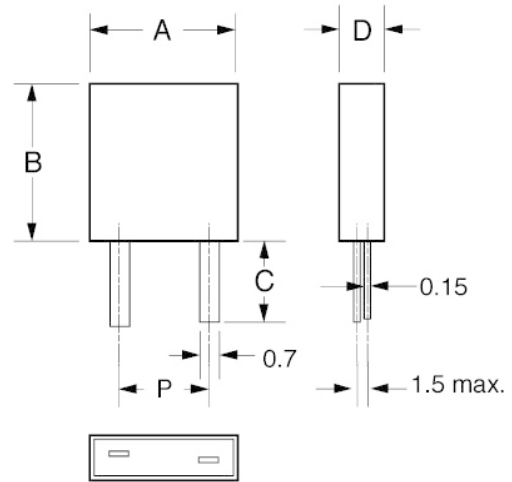

| Case | A ± 0.5 | B ± 0.5 | C ± 0.5 | D ± 0.5 | P ± 0.5 |
|------|---------|---------|---------|---------|---------|
| a | 10.8 | 12.2 | 6.7 | 3.8 | 7.7 |
| b | 7.9 | 9.3 | 6.0 | 3.6 | 5.0 |
| c | 7.0 | 9.0 | 6.0 | 3.5 | 5.0 |
| d | 5.0 | 6.5 | 5.0 | 2.5 | 2.5 |

| Codice Adimpex | Frequenza | Tolleranza | Impedenza | C1 | C2 | Case |
|-----------------|-----------|------------|-----------|--------|--------|------|
| LR004000 | 400 kHz | ± 2 kHz | 20 Ω | 120 pF | 470 pF | b |
| LR004550 | 455 kHz | ± 2 kHz | 20 Ω | 100 pF | 100 pF | c |
| LR004800 | 480 kHz | ± 2 kHz | 20 Ω | 100 pF | 100 pF | c |
| LR005000 | 500 kHz | ± 2 kHz | 20 Ω | 100 pF | 100 pF | c |
| LR006400 | 640 kHz | ± 2 kHz | 50 Ω | 100 pF | 100 pF | c |

CARATTERISTICHE

- Gamma di frequenza fornibile:
bassa frequenza: 190 ÷ 1050 kHz
alta frequenza: 1.00 ÷ 25.99 MHz

FEATURES

- Available frequency range:
low frequency: 190 ÷ 1050 kHz
high frequency: 1.00 ÷ 25.99 MHz