

CONNETTORI IDC DIP PASSO 2.00MM



Conn. IDC mini DIP basso profilo passo 2.00mm

Codice Adimpex: **MD004020-R**

CON IDC 2mm DIP DP2-20SB-L 20

Serie:DP2

p/n:DP2-20SB-L

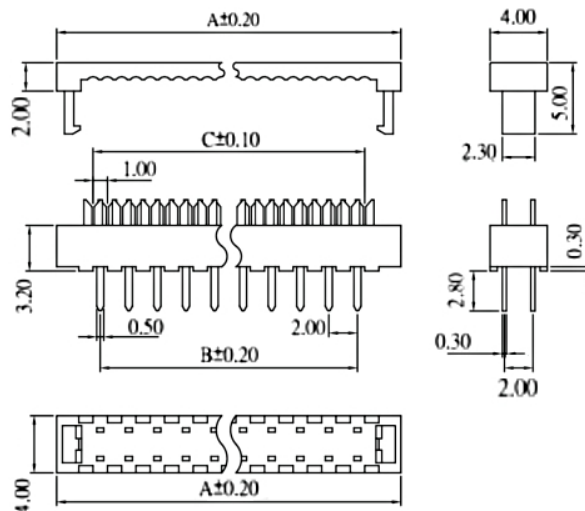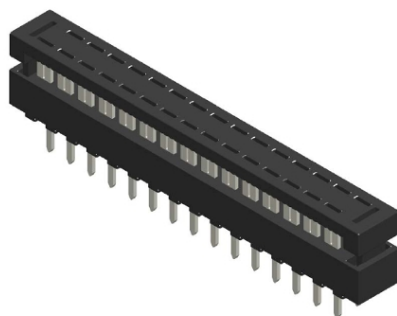

Codice Adimpex	n. posizioni
MD004008	08
MD004010	10
MD004012	12
MD004014	14
MD004016	16
MD004020	20
MD004022	22
MD004026	26
MD004028	28

Codice Adimpex	n. posizioni
MD004030	30
MD004034	34
MD004038	38
MD004040	40
MD004044	44
MD004046	46
MD004048	48
MD004050	50
MD004060	60

CARATTERISTICHE

- Corrente: 1A
- Resistenza di isolamento: 1000 MΩ min.
- Resistenza di contatto: 30 mΩ max.
- Rigidezza dielettrica 500V AC per un minuto
- Temperatura di Lavoro: -55°C ÷ 105°C
- Corpo: poliestere, UL 94V-0 PBT per montaggio standard
- Contatti: lega di rame

FEATURES

- *Current Rate: 1A*
- *Insulation resistance: 1000MΩ min.*
- *Contact resistance: 30mΩ max.*
- *Dielectric voltage 500V AC for one minute*
- *Operation temperature: -55°C ÷ 105°C*
- *Insulator: polyester, UL 94V-0 Standard PBT*
- *Contact pin: copper*

n. pin	A	B	C	n. pin	A	B	C
08	12.10	6.00	7.00	30	34.10	28.00	29.00
10	14.10	8.00	9.00	34	38.10	32.00	33.00
12	16.10	10.00	11.00	38	42.10	36.00	37.00
14	18.10	12.00	13.00	40	44.10	38.00	39.00
16	20.10	14.00	15.00	44	48.10	42.00	43.00
20	24.10	18.00	19.00	46	50.10	44.00	45.00
22	26.10	20.00	21.00	48	52.10	46.00	47.00
26	30.10	24.00	25.00	50	54.10	48.00	49.00
28	32.10	26.00	27.00	60	64.10	58.00	59.00

- Finiture: contatti stagnati

alloy

- *Contact plating: tin plated*