

**CONNETTORI TORNITI FEMMINA PASSO  
2.54MM**


**Femmina doppia fila H7.40mm mating pin  
ø0.47mm**

Codice Adimpex: **NPD00964-R**


B.FMgs 2.54/32+32 SHA-0642-B130740A

Serie:SHA-0740A

p/n:SHA-0642-B130740A

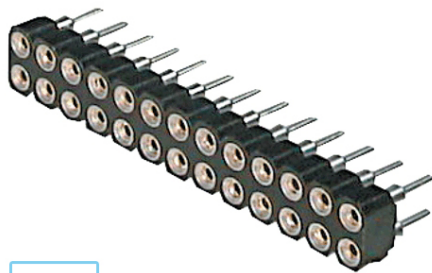

STANDARD

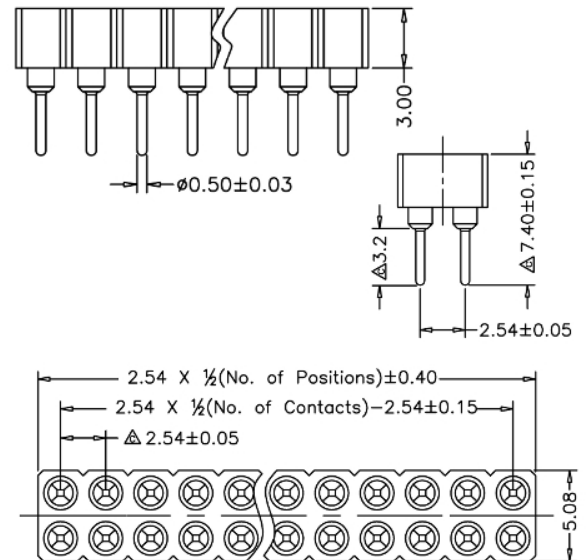

Codice Adimpex	n. posizioni
NPD00904	2+2
NPD00906	3+3
NPD00908	4+4
NPD00910	5+5
NPD00912	6+6
NPD00914	7+7
NPD00916	8+8

Codice Adimpex	n. posizioni
NPD00918	9+9
NPD00920	10+10
NPD00922	11+11
NPD00924	12+12
NPD00926	13+13
NPD00928	14+14
NPD009xx	xx (04 ÷ 72)

**CARATTERISTICHE**

- Corrente: 3 A
- Resistenza di isolamento: 1000 MΩ min.
- Resistenza di contatto: 4mΩ max.
- Rigidità dielettrica: 1000 V AC min.
- Temperatura di lavoro: -55°C ÷ +105°C
- Corpo: P.B.T. UL94V-0
- Contatto: rame berillio
- Terminale: ottone, tornito
- Finitura pin: selective gold
- Finitura clip: flash oro

**FEATURES**

- Current rate: 3 A
- Insulation resistance: 1000 MΩ min.
- Contact resistance: 4mΩ max.
- Dielectric voltage: 1000 V AC min.
- Operation temperature: -55°C ÷ +105°C
- Body: P.B.T. UL94V-0
- Contact clip: beryllium copper
- Sleeve: brass, machined
- Pin plating: selective gold
- Clip plating: gold flash