

CONNETTORI TORNITI FEMMINA PASSO 2.54MM



Femmina doppia fila H10.00mm mating pin $\phi 0.47\text{mm}/0.64\text{SQ}$

Codice Adimpex: **NPD05834-R**

C.FM gs 2.54/17+17 SHA-0342-D131000A

Serie:SHA-1000A

p/n:SHA-0342-D131000A

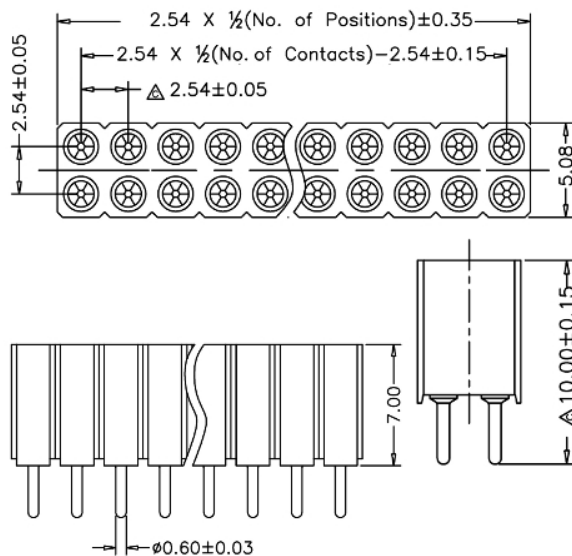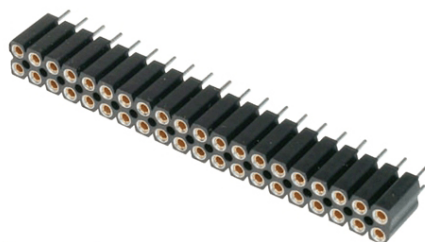

Codice Adimpex	n. posizioni
NPD05804	2+2
NPD05806	3+3
NPD05808	4+4
NPD05810	5+5
NPD05812	6+6
NPD05814	7+7
NPD05816	8+8

Codice Adimpex	n. posizioni
NPD05818	9+9
NPD05820	10+10
NPD05822	11+11
NPD05824	12+12
NPD05826	13+13
NPD05828	14+14
NPD058xx	xx (02 ÷ 80)

CARATTERISTICHE

- Corrente: 3 A
- Resistenza di isolamento: 1000 M Ω min.
- Resistenza di contatto: 4m Ω max.
- Rigidità dielettrica: 1000 V AC min.
- Temperatura di lavoro: -55°C ÷ +105°C
- Corpo: P.B.T. UL94V-0
- Contatto: rame berillio
- Terminale: ottone, tornito
- Finitura pin: selective gold
- Finitura clip: flash oro

FEATURES

- Current rate: 3 A
- Insulation resistance: 1000 M Ω min.
- Contact resistance: 4m Ω max.
- Dielectric voltage: 1000 V AC min.
- Operation temperature: -55°C ÷ +105°C
- Body: P.B.T. UL94V-0
- Contact clip: beryllium copper
- Sleeve: brass, machined
- Pin plating: selective gold
- Clip plating: gold flash