


Serracavi

Codice Adimpex: **IK008031-R**

BLOCCACAVO SR-F31

p/n: SRR-F31

Pinza per bloccacavo

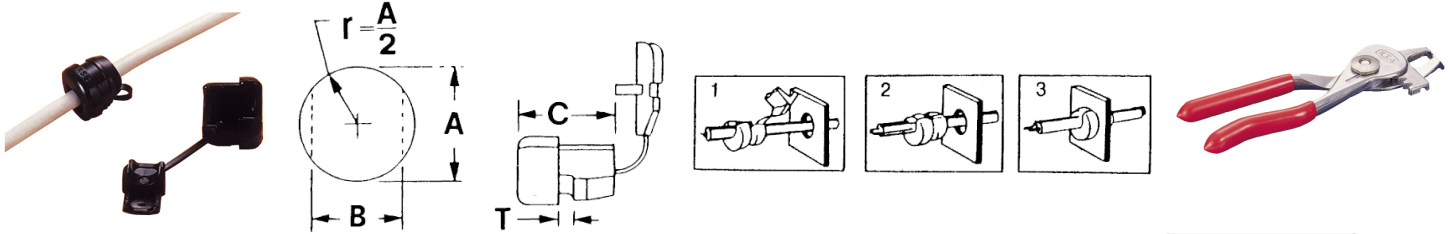

Codice Adimpex
 IK601010

Codice Adimpex	tipo	sezione cavo	dimensioni cavo	A	B	C	T	colore
IK008021	SR-F21	flat	2.3x4.5 / 2.8x5.3	9.5	8.7	10.3	0.5 ÷ 1.6	nero
IK008023	SR-F23		2.3x4.5 / 2.8x5.3	9.5	8.7	10.3	1.8 ÷ 3.2	nero
IK008031	SR-F31		3.0x5.6	11.2	9.9	10.3	1.0 ÷ 1.6	nero
IK008032	SR-F32		3.0x5.6	11.0	9.9	10.3	1.9 ÷ 2.5	nero
IK008141	SR-F41		3.0x7.1 / 3.8x7.6	12.7	11.8	10.3	0.5 ÷ 1.6	nero
IK008142	SR-F42		3.0x7.1 / 3.8x7.6	12.7	11.8	10.3	1.8 ÷ 2.5	nero
IK008151	SR-F51		5x10.4	14.3	12.9	15.2	0.5 ÷ 1.6	nero
IK008153	SR-F53		5x10.4	14.3	12.9	15.2	1.8 ÷ 3.5	nero
IK008183	SR-F83		6x15.2	21.6	21.3	20.4	2.0 ÷ 3.4	nero
IK008245	SR-5R1		round	ø6.2 ÷ ø7.4	12.8	11.5	11.0	0.5 ÷ 1.6
IK008246	SR-5R2	ø6.2 ÷ ø7.4		13.0	11.5	11.0	1.8 ÷ 2.5	nero
IK008363	SR-6W2	ø7.6		12.8	11.8	11.0	1.8 ÷ 2.3	nero
IK008461	SR-6P1	ø7.4 ÷ ø8.2		15.9	14.0	14.8	0.5 ÷ 1.6	nero
IK008463	SR-6P3	ø7.4 ÷ ø8.2		15.9	14.0	14.8	1.9 ÷ 3.2	nero
IK008345	SR-6R1	ø8.2 ÷ ø9.2		15.9	14.0	14.8	0.5 ÷ 1.6	nero
IK008346	SR-6R3	ø8.2 ÷ ø9.2		15.9	14.0	14.8	1.9 ÷ 3.2	nero
IK008671	SR-7R1	ø9.2 ÷ ø10.5 / ø11		19.9	17.0	19.0	0.5 ÷ 1.6	nero
IK008673	SR-7R3	ø9.2 ÷ ø10.5 / ø11		19.7	17.0	19.0	1.9 ÷ 3.2	nero
IK008683	SR-8R3	ø12 ÷ ø15.2		21.6	21.3	20.6	1.9 ÷ 3.2	nero
IK008691	SR-9R1	ø11 ÷ ø15	15.0	19.0	17.5	0.5 ÷ 1.6	nero	
IK008697	SR-9R7	ø15.2 ÷ ø16.3 / ø17.5	28.0 / 30.2	25.5	25.2	1.0 ÷ 3.2	nero	

