

## RISONATORI CERAMICI



### Bassa frequenza

Codice Adimpex: **LR004320-L**

RISONATORE CERAMICO 432KHz

Serie:CR

p/n:CR0432E

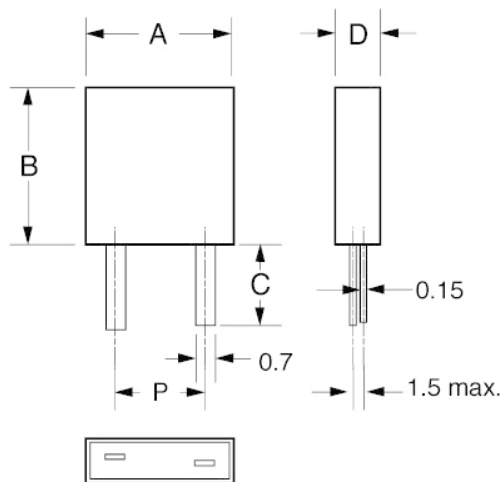

Case	A ± 0.5	B ± 0.5	C ± 0.5	D ± 0.5	P ± 0.5
a	10.8	12.2	6.7	3.8	7.7
b	7.9	9.3	6.0	3.6	5.0
c	7.0	9.0	6.0	3.5	5.0
d	5.0	6.5	5.0	2.5	2.5

Codice Adimpex	Frequenza	Tolleranza	Impedenza	C1	C2	Case
LR004000	400 kHz	± 2 kHz	20 Ω	120 pF	470 pF	b
LR004550	455 kHz	± 2 kHz	20 Ω	100 pF	100 pF	c
LR004800	480 kHz	± 2 kHz	20 Ω	100 pF	100 pF	c
LR005000	500 kHz	± 2 kHz	20 Ω	100 pF	100 pF	c
LR006400	640 kHz	± 2 kHz	50 Ω	100 pF	100 pF	c

### CARATTERISTICHE

- Gamma di frequenza fornibile:  
bassa frequenza: 190 ÷ 1050 kHz  
alta frequenza: 1.00 ÷ 25.99 MHz

### FEATURES

- Available frequency range:  
low frequency: 190 ÷ 1050 kHz  
high frequency: 1.00 ÷ 25.99 MHz