

INDICATORI AUDIO PIEZO CON CIRCUITO DI PILOTAGGIO

PK-35A29WQ/35N29WQ

PF-35N29WQ


PL-35N29WQ

Codice Adimpex: **NBH05630-R**

INDIC.AUDIO P.ZO FL PL-35N29WQ

Serie:PK; PF; PL

p/n:PL-35N29W-Q

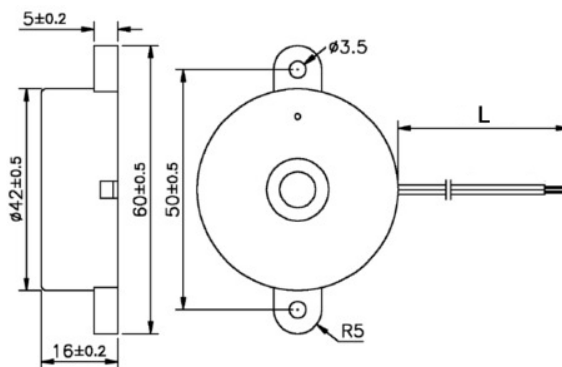

Codice Adimpex	Freq. di risonanza (Hz) ± 500	Tensione di lavoro (V)	Min. livello sonoro (dB) @ 30cm	Tono	Assorbimento (mA) max.	L
NBH05640	2900	3.0 ÷ 24	95 @ 12V DC	Costante	10 @ 12V DC	140
NBH05610	2900	3.0 ÷ 28	90 @ 12V DC	Costante	10 @ 12V DC	140
NBH05615	2900	3.0 ÷ 28	90 @ 12V DC	Costante	10 @ 12V DC	400
NBH05620	2900	3.0 ÷ 28	90 @ 12V DC	Fast pulse 3.0 Hz	8 @ 12V DC	140
NBH05630	2900	3.0 ÷ 28	90 @ 12V DC	Slow pulse 1.2 Hz	8 @ 12V DC	140