

**CONNETTORI SCHEDA-FILO PASSO 2.50MM**



**2501 Maschio dritto**

Codice Adimpex: **J2501406-R**

CONN. MS p2.5 EX2501WV-06P

Serie:2501-WV

p/n:250106WV001

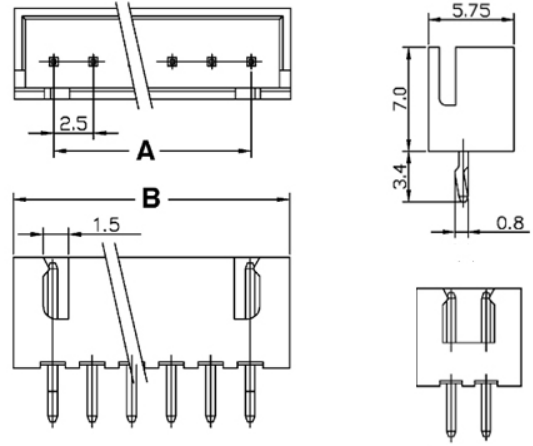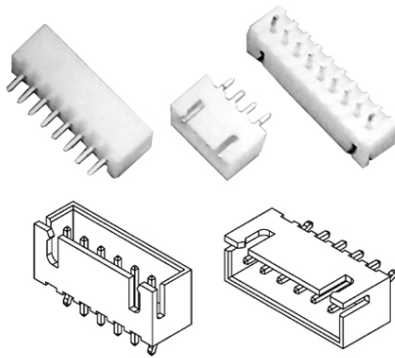

Dimensioni  
A = 2.5 x (n - 1)  
B = A + 5  
n = n° contatti

(2 Circuits)

Codice Adimpex	n. posizioni
J2501402	2
J2501403	3
J2501404	4
J2501405	5
<b>J2501406</b>	6
J2501407	7
J2501408	8

Codice Adimpex	n. posizioni
J2501409	9
J2501410	10
J2501411	11
J2501412	12
J2501413	13
J2501414	14
J25014xx	xx (02÷20)

**CARATTERISTICHE**

- Passo: 2.5mm
- Corrente: 3A AC/DC
- Tensione: 250V AC/DC
- Cavo: AWG 28÷22
- Corpo: Nylon 66 UL94V-0 colore naturale
- Terminali maschio: ottone stagnati
- Gamma di temperatura: -25°C ÷ 105°C

**FEATURES**

- Pitch: 2.5mm
- Current rating: 3A AC/DC
- Voltage rating: 250V AC/DC
- Applicable wires: AWG 28÷22
- Housing: Nylon 66 UL94V-0 natural color
- Male pins: brass, tin-plated
- Operating temperature range: -25°C ÷ 105°C

